

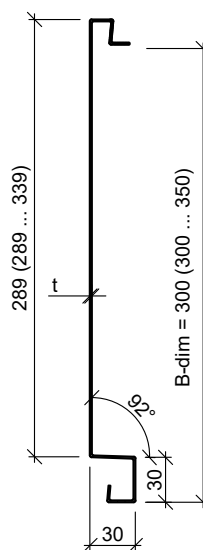

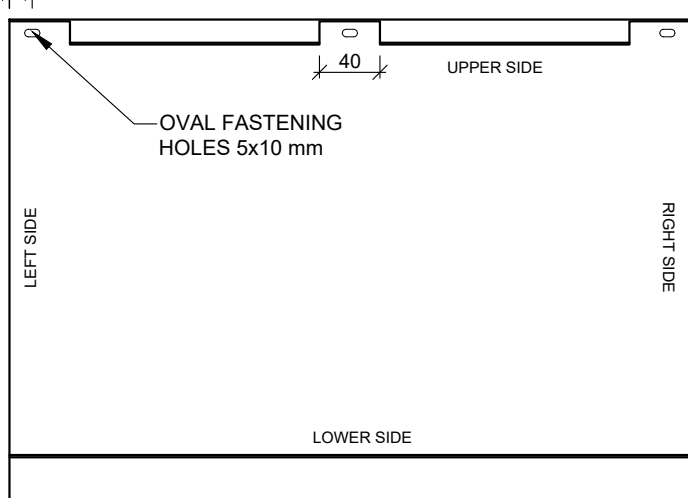


Date	01.09.2010	Rev. date	16.10.2020	Work nr.	Drw. nr.	Rev.
Drawn by	Ruukki	Rev.	v1		CL100E	c
Scale	1:10	Building			File nr.	

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products


From 2-5 fastening holes, equally spaced, max c/c 750 mm
> or order-specific fastening hole distance

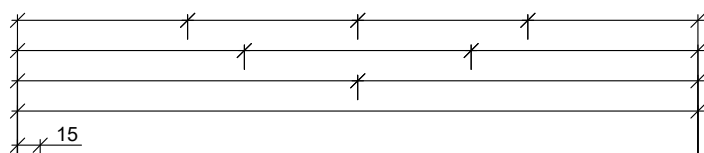


oval ventilation holes 5x15 mm in lower edge,
distance according to lamella fastening hole instruction

CORNER LAMELLAS


A LEFT EXTERNAL CORNER




B RIGHT EXTERNAL CORNER




C LEFT INTERNAL CORNER



D RIGHT INTERNAL CORNER



HORIZONTAL JOINT

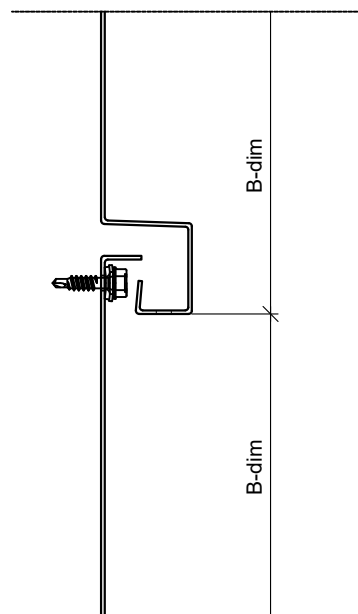

Material thickness $t = 1.20$ mm
Blank width = 410 (410 ... 460) mm

Starting fillet CA1SF7 required