

Drw. nr.	Contents of drawing	Date	Rev.	Rev. date
S100DM01	Primo Skyline 100 / Basic panel	25.10.2019	b	04.10.2023
S100DM02	Primo Skyline 100 / Joints overview	12.11.2019	g	04.10.2023
S100DM03	Primo Skyline 100 / Corner panel	25.10.2019	c	04.10.2023

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

City sector	Block	Site/Reg. nr.	File nr.		
Building type			Drawing type		Nr.
Building, Name and address			Contents of drawing		Scale
			PRIMO Skyline 100		1:10
			Dimensional drawings		
			<u>Patented EP19209416</u>		
Date	25.10.2019	Designer	Ruukki		Work nr.
Drawn by		Checked			Drw. nr.
					Rev.
					C



Contents of drawing

Primo Skyline 100


Basic panel

Dimensional drawing


Patented EP19209416

Date	25.10.2019	Rev. date	04.10.2023	Work nr.	Drw. nr.	Rev.
Drawn by	Ruukki	Rev.	P03		S100DM01	c
Scale	1:10	Building			File nr.	

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

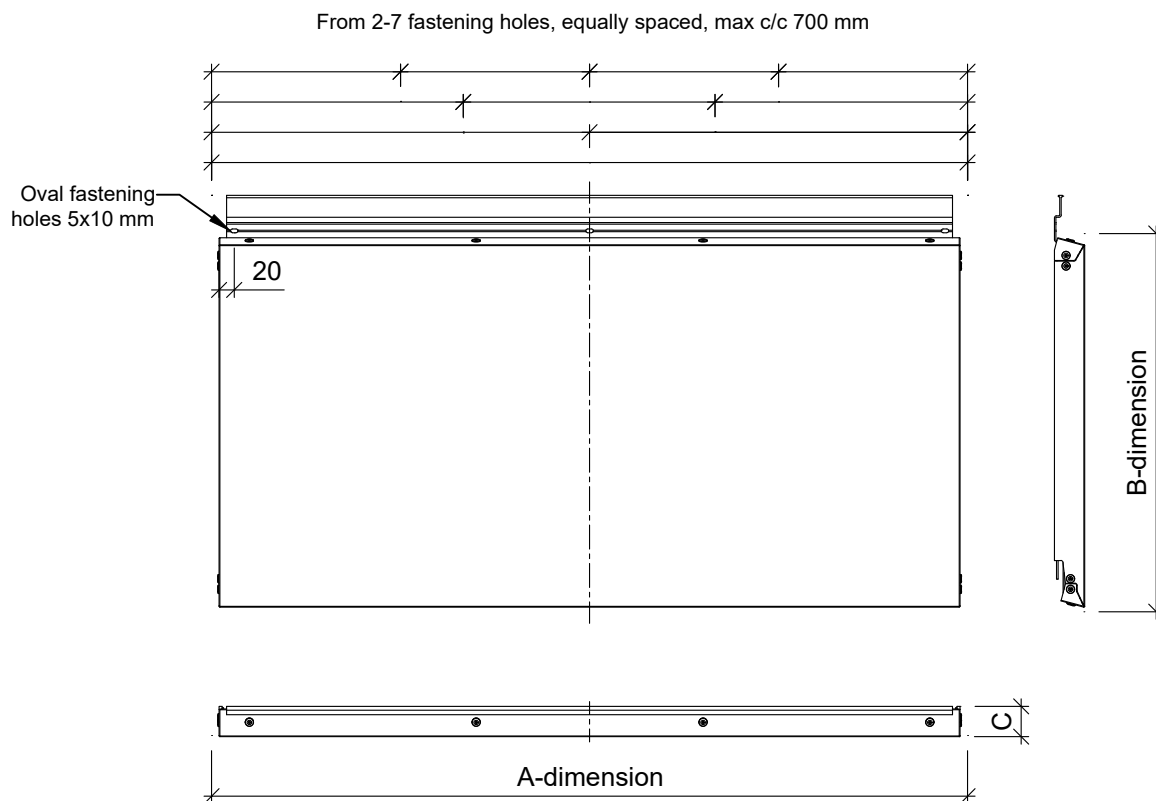

Vertical joint 1:5

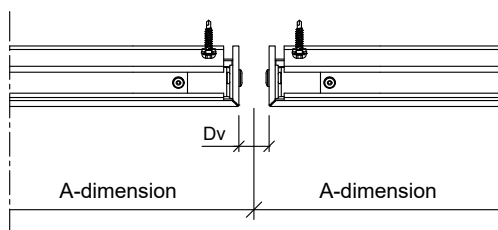

panel depth C = 40 mm
horizontal joint Dh = 5-35 mm
vertical joint Dv = 5-35 mm
material thickness t = 4.0 mm (ACM)
weep holes 15x5 mm at the bottom, max c/c 300 mm

Amin, Bmin = 200 mm
Amax = 4000 mm
Bmax = 1000 mm



Contents of drawing

Primo Skyline 100

Horizontal joint logic

Dimensional drawing


Patented EP19209416

Date	12.11.2019	Rev. date	04.10.2023	Work nr.	Drw. nr.	Rev.
Drawn by	Ruukki	Rev.	P03		S100DM02	g
Scale	1:2.5	Building			File nr.	


Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

Horizontal joint logic applies to all panel types


Horizontal joint
(hidden fix)

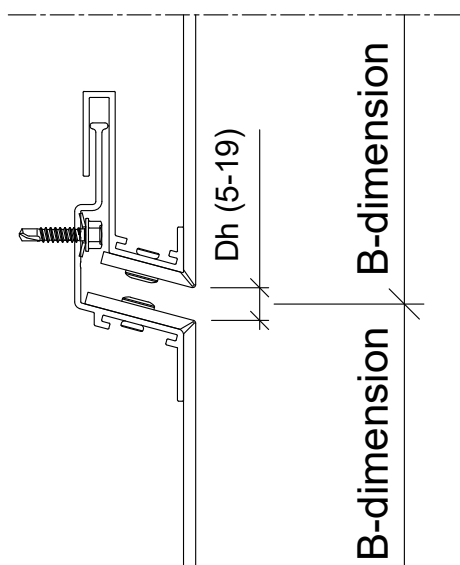

Horizontal joint
(hidden fix)

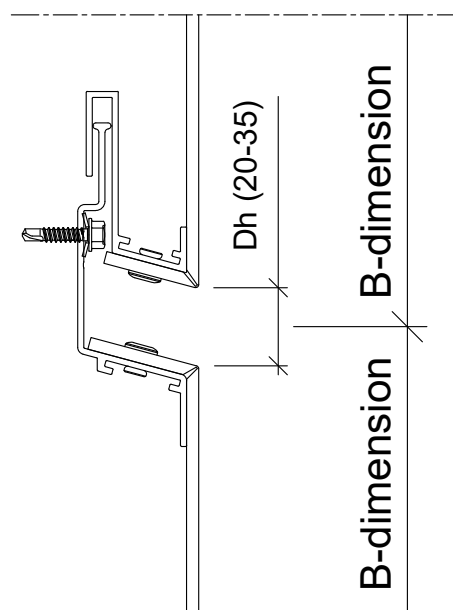

Horizontal joint
(replacable)

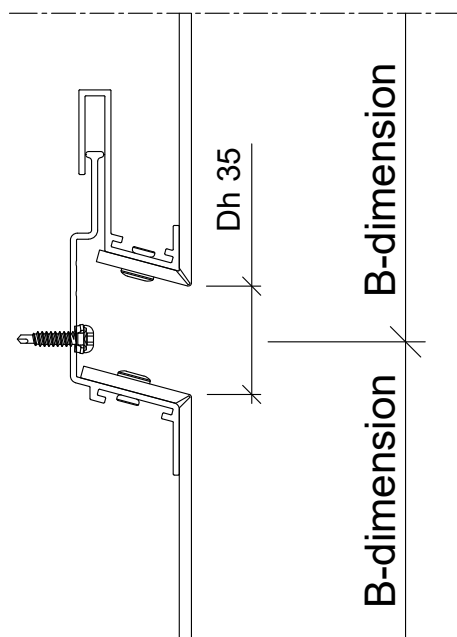



Contents of drawing

Primo Skyline 100



Corner panel

Dimensional drawing

Patented EP19209416

Date	25.10.2019	Rev. date	04.10.2023	Work nr.	Drw. nr.	Rev.
Drawn by	Ruukki	Rev.	P03		S100DM03	d
Scale	1:10	Building			File nr.	

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

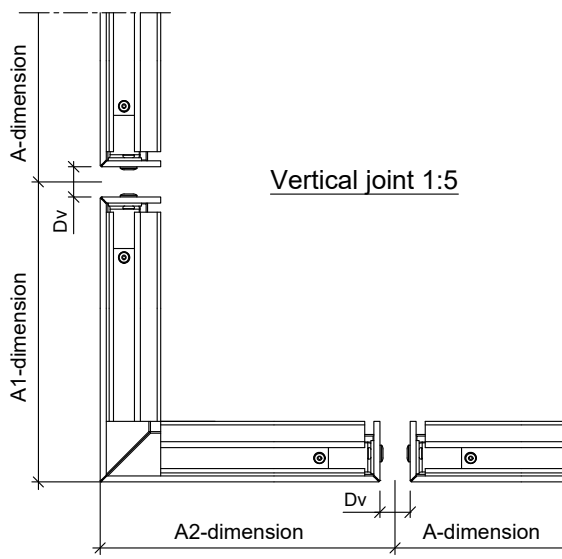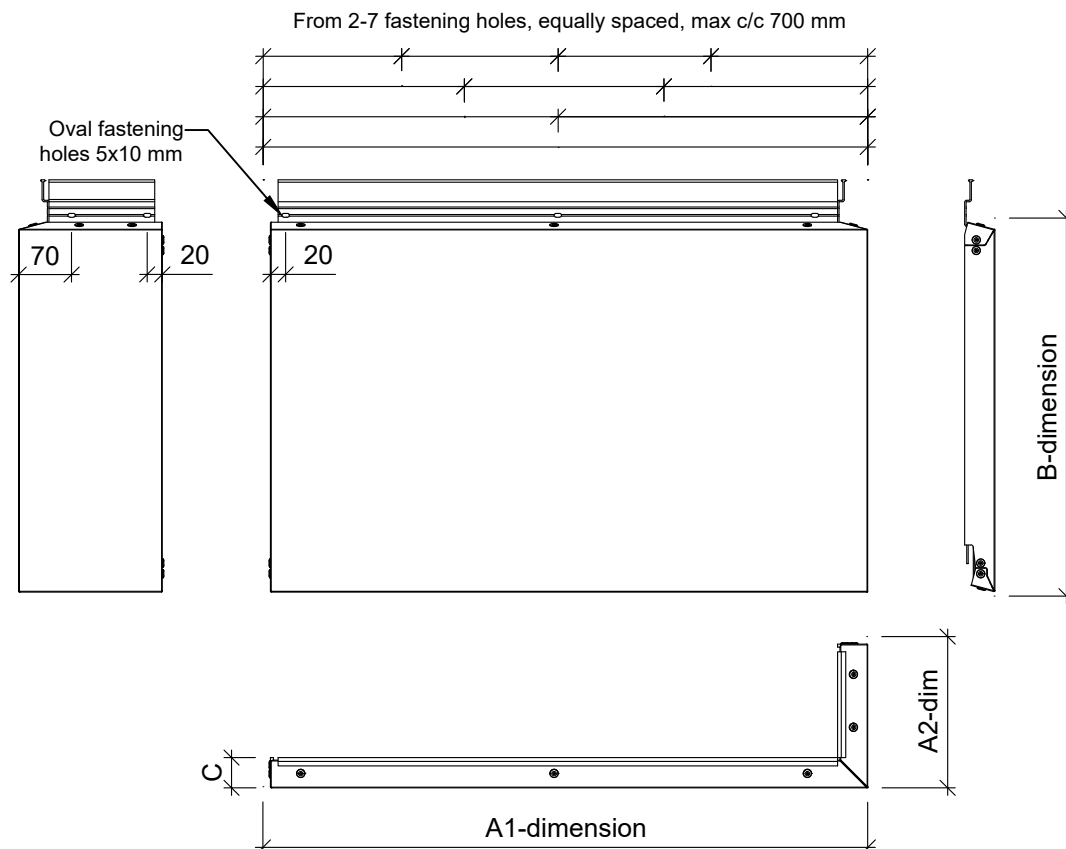

panel depth C = 40 mm
horizontal joint Dh = 5-35 mm
vertical joint Dv = 5-35 mm
material thickness t = 4.0 mm (ACM)
weep holes 15x5 mm at the bottom, max c/c 300 mm

Amin, Bmin = 200 mm
(A1 + A2)max = 4000 mm
Bmax = 1000 mm