


Drw. nr.	Contents of drawing	Date	Rev.	Rev. date
RSP600E-1	Liberta Cor-Ten 600 / Basic panel	01.09.2010	e	20.10.2023
RSP600E-2	Liberta Cor-Ten 600 / Corner panel	01.09.2010	e	20.10.2023
RSP600E-3	Liberta Cor-Ten 600 / Pitched panel, upper edge A	21.08.2018	e	20.10.2023
RSP600E-4	Liberta Cor-Ten 600 / Pitched panel, lower edge B	21.08.2018	e	20.10.2023
RSP600E-5	Liberta Cor-Ten 600 / Pitched panel, left vertical edge C	25.09.2018	e	20.10.2023
RSP600E-6	Liberta Cor-Ten 600 / Pitched panel, right vertical edge D	25.09.2018	e	20.10.2023
RSP600E-7	Liberta Cor-Ten 600 / U-panel	19.07.2019	e	20.10.2023

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

City sector	Block	Site/Reg. nr.	File nr.			
Building type			Drawing type Nr.			
Building, Name and address 			Contents of drawing Liberta Cor-Ten 600		Scale 1:10	
			Dimensional drawings			
Date 01.09.2010	Designer Ruukki		Work nr.	Work nr.	Drw. nr.	Rev.
Drawn by	Checked					

RUUKKI



Contents of drawing

Liberta Cor-Ten 600

Basic panel

Dimensional drawing

Date 01.09.2010

Rev. date 20.10.2023

Work nr.

Drw. nr.

Rev.

Drawn by Ruukki

Rev. v1

RSP600E-1

e




Scale 1:10

Building


File nr.

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

Fastening holes according to the table, equally spaced or order-specific fastening hole distance

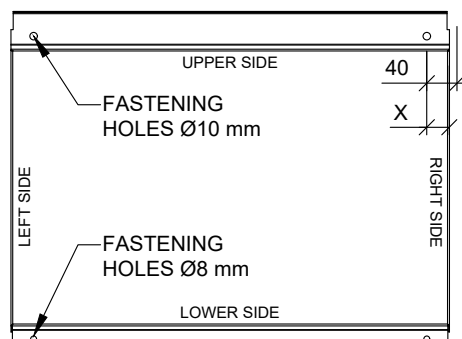


Fastening holes	
Width	Holes
240-700	2
701-1400	3
1401-2100	4
2101-2800	5
2801-3500	6
3501-3800	7




Dv = 10 mm, X = 35 mm
Dv = 15 mm, X = 32.5 mm
Dv = 20 mm, X = 30 mm
Dv = 25 mm, X = 27.5 mm
Dv = 30 mm, X = 25 mm

HORIZONTAL JOINT 1:5

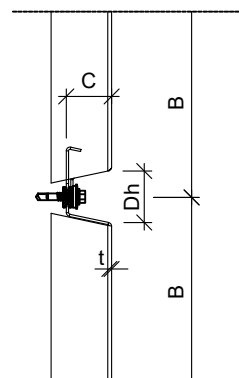


VERTICAL JOINT 1:5



panel depth C = 30 mm
horizontal joint Dh = 34 mm
vertical joint Dv = 10, 15, 20, 25, 30 mm
material thickness t = 1.50 mm

Amin, Bmin = 100 mm
Bmax = 1150 mm

RUUKKI



Contents of drawing

Liberta Cor-Ten 600

Corner panel

Dimensional drawing

Date 01.09.2010

Rev. date 20.10.2023

Work nr.

Drw. nr.

Rev.

Drawn by Ruukki

Rev. v1

RSP600E-2

e

Scale 1:10




Building

File nr.


Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

Fastening holes according to the table, equally spaced
or order-specific fastening hole distance


Fastening holes	
Width	Holes
240-700	2
701-1400	3
1401-2100	4
2101-2800	5
2801-3500	6
3501-3800	7

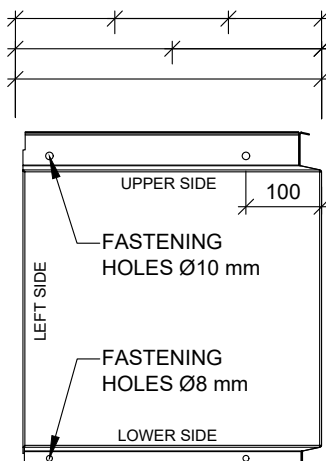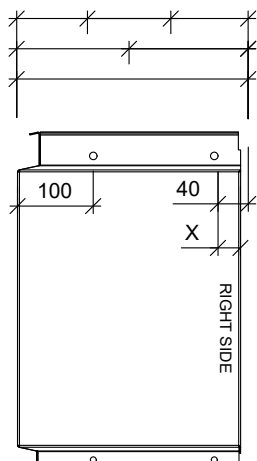

Dv = 10 mm, X = 35 mm
Dv = 15 mm, X = 32.5 mm
Dv = 20 mm, X = 30 mm
Dv = 25 mm, X = 27.5 mm
Dv = 30 mm, X = 25 mm

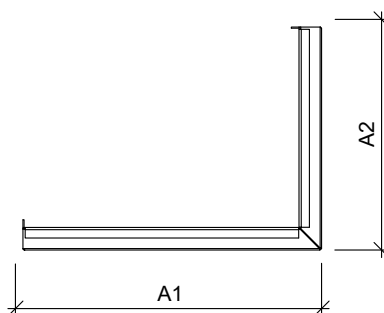


HORIZONTAL JOINT 1:5

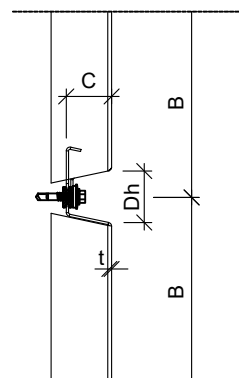


panel depth C = 30 mm
horizontal joint Dh = 34 mm
vertical joint Dv = 10, 15, 20, 25, 30 mm
material thickness t = 1.50 mm

A1 or A2min = 60 mm, Bmin = 100 mm
A1 or A2max = 1000 mm, Bmax = 1150 mm
A1+A2 = min 120 mm
A1+A2 = max 3000 mm

VERTICAL JOINT 1:5

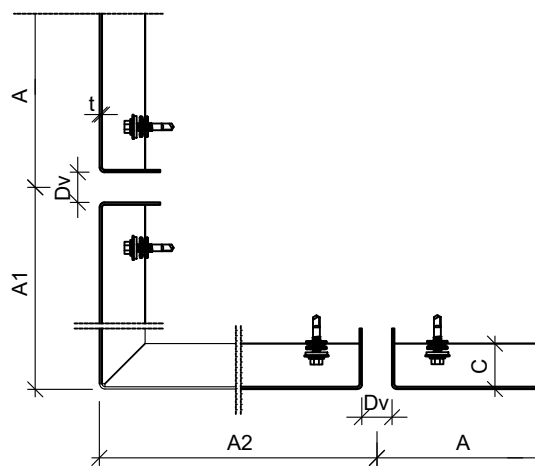

RUUKKI



Contents of drawing

Liberta Cor-Ten 600

Pitched panel, upper edge A

Dimensional drawing

Date 21.08.2018

Rev. date 20.10.2023

Work nr.

Drw. nr.

Rev.

Drawn by Ruukki

Rev. v1

RSP600E-3

e

Scale 1:10


Building

File nr.


Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

Fastening holes	
Width	Holes
240-700	2
701-1400	3
1401-2100	4
2101-2800	5
2801-3500	6
3501-3800	7


Fastening holes according to the table, equally spaced or order-specific fastening hole distance

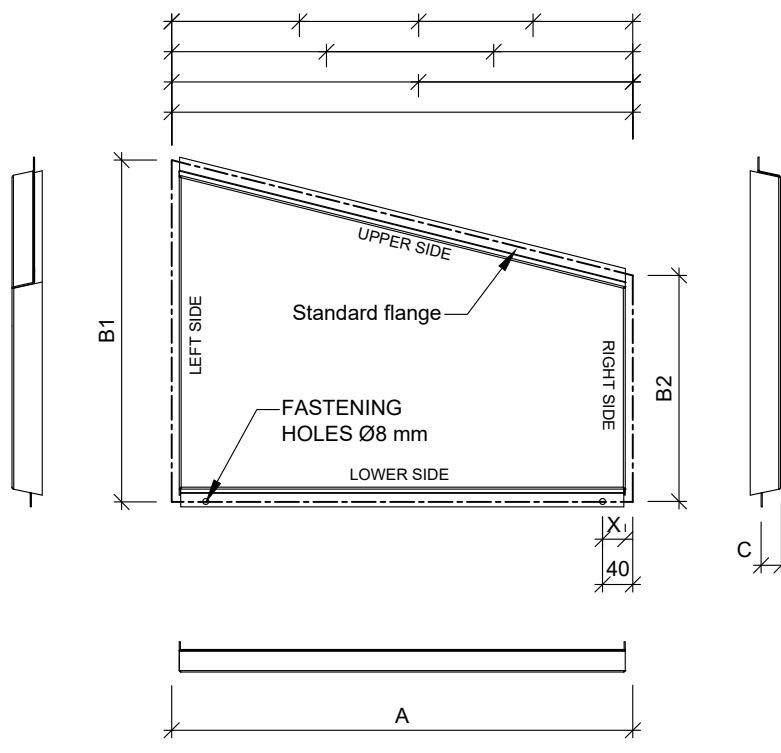

HORIZONTAL JOINT 1:5

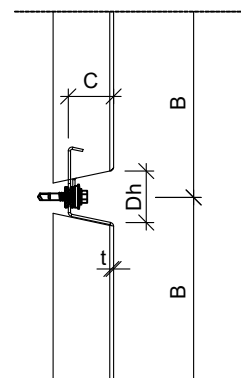


VERTICAL JOINT 1:5



panel depth C = 30 mm
horizontal joint Dh = 34 mm
vertical joint Dv = 10, 15, 20, 25, 30 mm
material thickness t = 1.50 mm

Amin, Bmin = 100 mm
Bmax = 1150 mm

RUUKKI



Contents of drawing

Liberta Cor-Ten 600

Pitched panel, lower edge B

Dimensional drawing

Date 21.08.2018

Rev. date 20.10.2023

Work nr.

Drw. nr.

Rev.

Drawn by Ruukki

Rev. v1

RSP600E-4

e

Scale 1:10



Building

File nr.

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products


Fastening holes	
Width	Holes
240-700	2
701-1400	3
1401-2100	4
2101-2800	5
2801-3500	6
3501-3800	7

Fastening holes according to the table, equally spaced or order-specific fastening hole distance

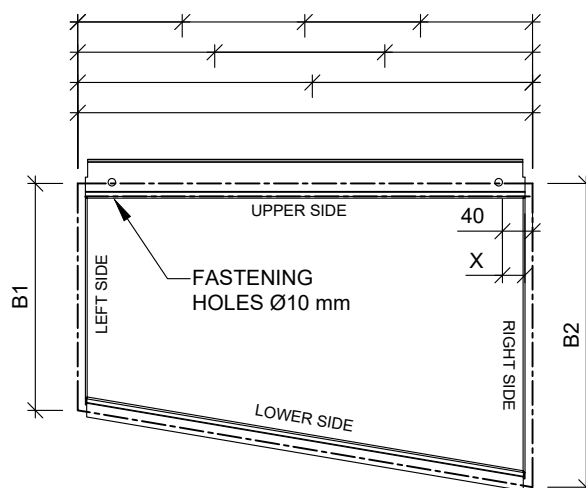


Dv = 10 mm, X = 35 mm
Dv = 15 mm, X = 32.5 mm
Dv = 20 mm, X = 30 mm
Dv = 25 mm, X = 27.5 mm
Dv = 30 mm, X = 25 mm

HORIZONTAL JOINT 1:5

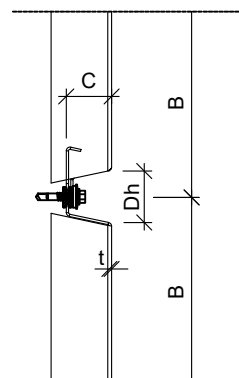


VERTICAL JOINT 1:5



panel depth C = 30 mm
horizontal joint Dh = 34 mm
vertical joint Dv = 10, 15, 20, 25, 30 mm
material thickness t = 1.50 mm

Amin, Bmin = 100 mm
Bmax = 1150 mm

RUUKKI



Contents of drawing

Liberta Cor-Ten 600

Pitched panel, left vertical edge C

Dimensional drawing

Date 25.09.2018

Rev. date 20.10.2023

Work nr.

Drw. nr.

Rev.

Drawn by Ruukki

Rev. v1

RSP600E-5


e

Scale 1:10


Building

File nr.


Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

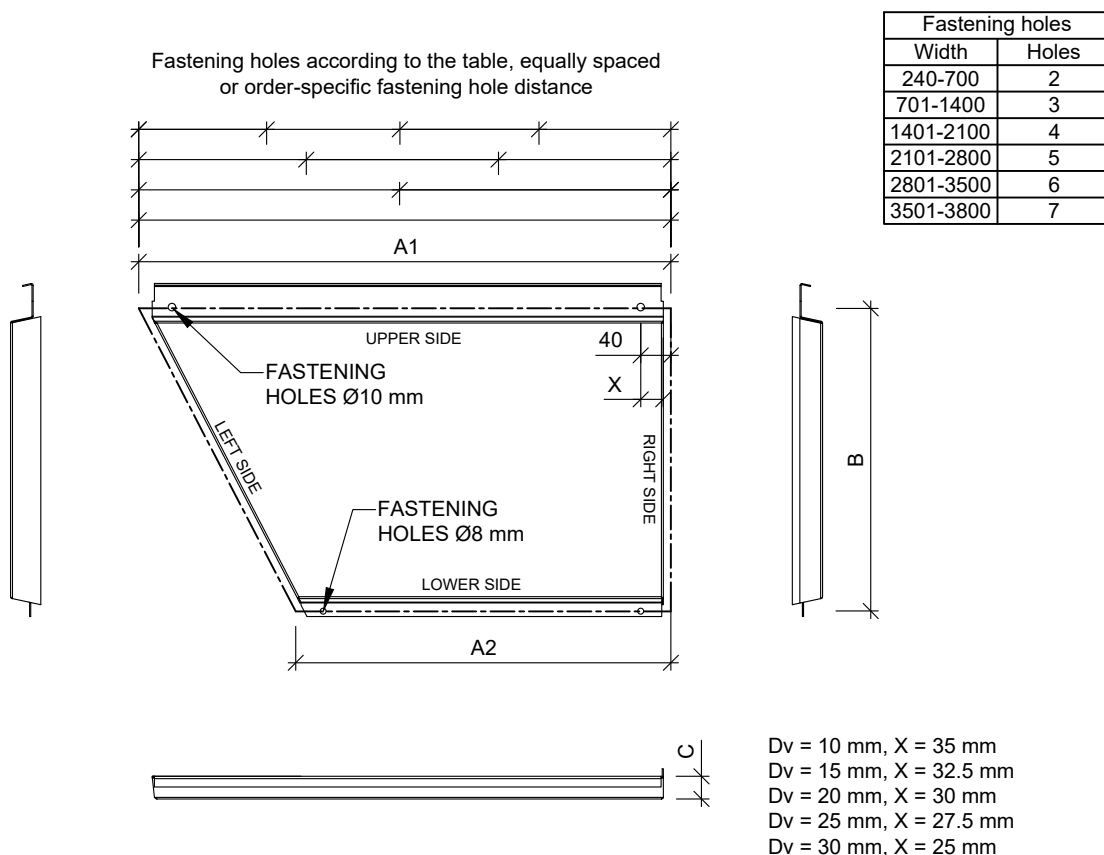

HORIZONTAL JOINT 1:5

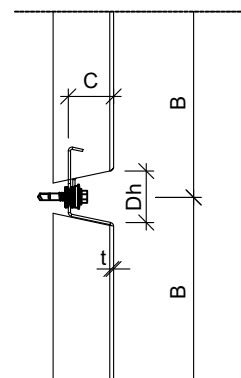


VERTICAL JOINT 1:5



panel depth C = 30 mm
horizontal joint Dh = 34 mm
vertical joint Dv = 10, 15, 20, 25, 30 mm
material thickness t = 1.50 mm

Amin, Bmin = 100 mm
Bmax = 1150 mm

RUUKKI



Contents of drawing

Liberta Cor-Ten 600

Pitched panel, right vertical edge D

Dimensional drawing

Date 25.09.2018

Rev. date 20.10.2023

Work nr.

Drw. nr.

Rev.

Drawn by Ruukki

Rev. v1

RSP600E-6


e

Scale 1:10


Building

File nr.


Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

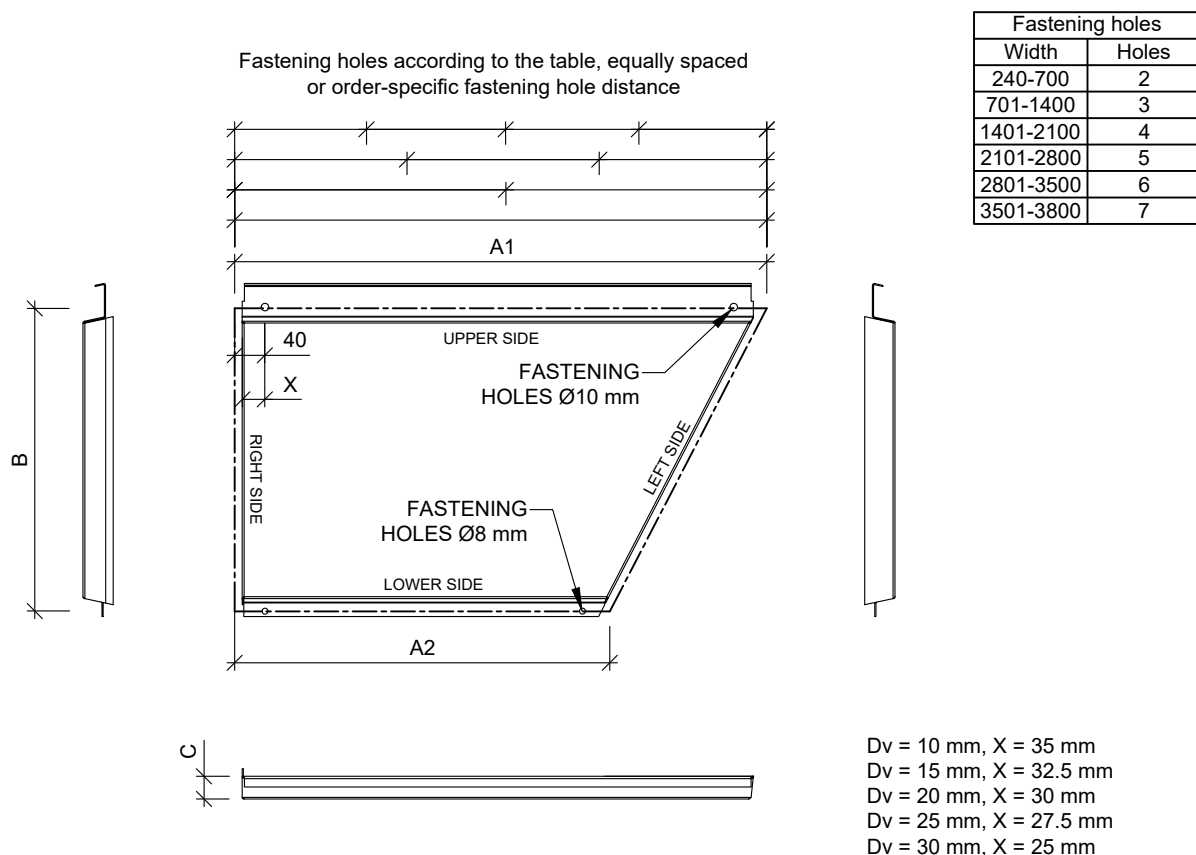

HORIZONTAL JOINT 1:5

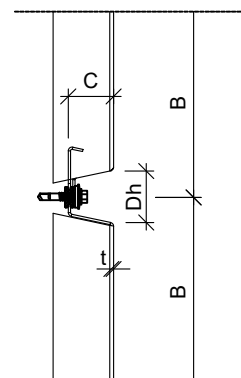


VERTICAL JOINT 1:5



panel depth C = 30 mm
horizontal joint Dh = 34 mm
vertical joint Dv = 10, 15, 20, 25, 30 mm
material thickness t = 1.50 mm

Amin, Bmin = 100 mm
Bmax = 1150 mm

RUUKKI



Contents of drawing

Libertà Cor-Ten 600






U-panel

Dimensional drawing

Date	19.07.2019	Rev. date	20.10.2023	Work nr.	Drw. nr.	Rev.
Drawn by	Ruukki	Rev.	v1		RSP600E-7	e
Scale	1:10	Building			File nr.	


Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

Fastening holes according to the table, equally spaced
or order-specific fastening hole distance

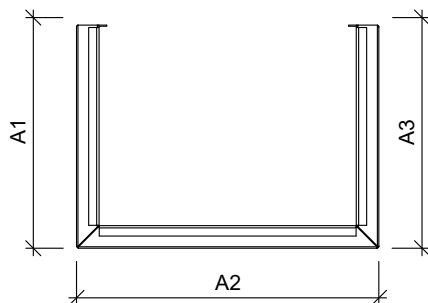


Fastening holes	
Width	Holes
240-700	2
701-1400	3
1401-2100	4
2101-2800	5
2801-3500	6
3501-3800	7

HORIZONTAL JOINT 1:5

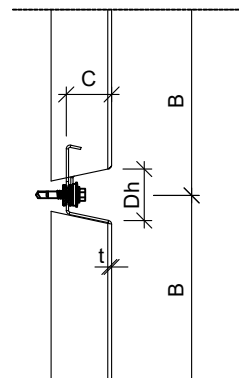

VERTICAL JOINT 1:5

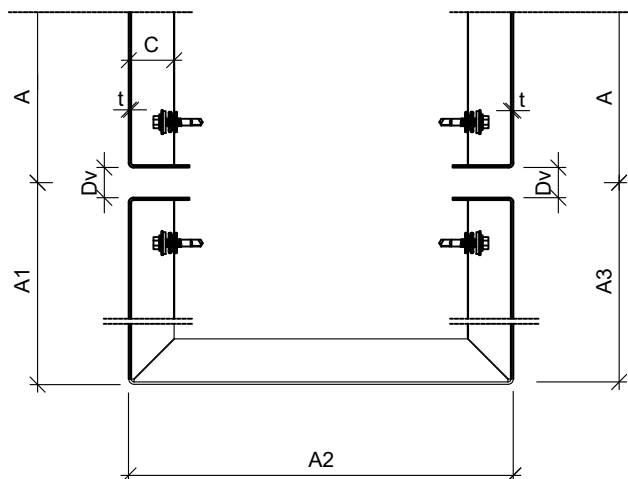

panel depth $C = 30$ mm
horizontal joint $D_h = 34$ mm
vertical joint $D_v = 10, 15, 20, 25, 30$ mm
material thickness $t = 1.50$ mm

$A_1 + A_2 + A_3 = \max 2000$ mm, $B_{\max} = 1150$ mm
 A_1 or $A_3 = \min 60$ mm, $A_{2\min} = 120$ mm, $B_{\min} = 100$ mm