

Drw. nr.	Contents of drawing	Date	Rev.	Rev. date
RSP550E-1	Liberta Elegant 550/ Basic panel	07.03.2019	c	14.07.2021
RSP550E-2	Liberta Elegant 550/ Corner panel	07.03.2019	c	14.07.2021
RSP550E-3	Liberta Elegant 550/ Pitched panel, upper edge A	07.03.2019	c	14.07.2021
RSP550E-4	Liberta Elegant 550/ Pitched panel, lower edge B	07.03.2019	c	14.07.2021
RSP550E-5	Liberta Elegant 550/ Pitched panel, left vertical edge C	07.03.2019	c	14.07.2021
RSP550E-6	Liberta Elegant 550/ Pitched panel, right vertical edge D	07.03.2019	b	17.09.2020
RSP550E-7	Liberta Elegant 550/ U-panel	07.03.2019	c	14.07.2021

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

City sector	Block	Site/Reg. nr.	File nr.			
Building type			Drawing type		Nr.	
Building, Name and address 			Contents of drawing Liberta Elegant 550		Scale 1:10	
			Dimensional drawings			
Date 07.03.2019	Designer Ruukki		Work nr.	Work nr.	Drw. nr.	Rev.
Drawn by	Checked					



Contents of drawing

Liberta Elegant 550


Basic panel

Dimensional drawing


Date	07.03.2019	Rev. date	14.07.2021	Work nr.	Drw. nr.	Rev.
Drawn by	Ruukki	Rev.	F02		RSP550E-1	c
Scale	1:10	Building			File nr.	

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products


From 2-5 fastening holes, equally spaced, max c/c 750 mm
OR order specific fastening hole distance

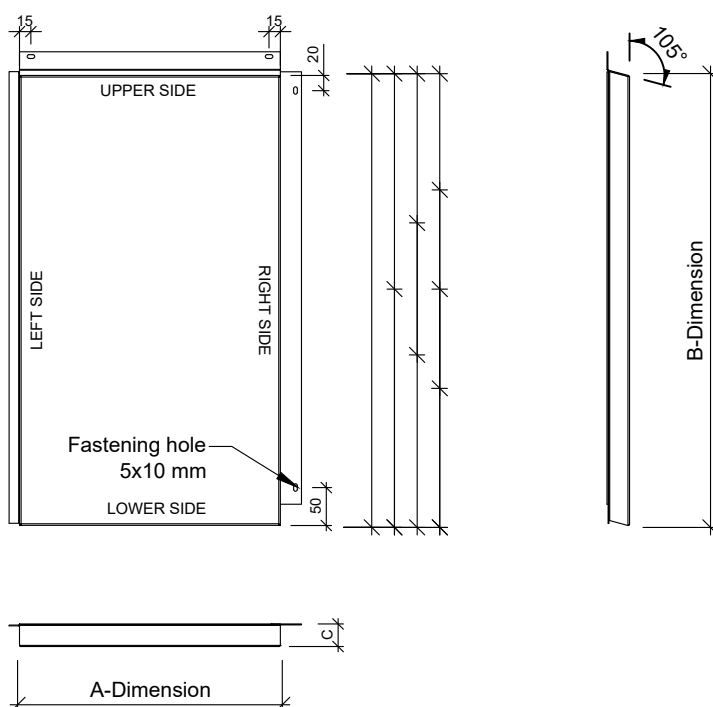

HORIZONTAL JOINT

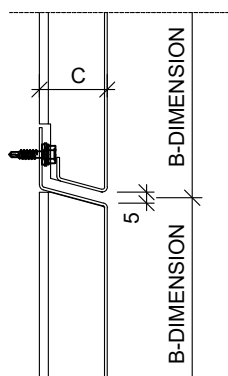

VERTICAL JOINT

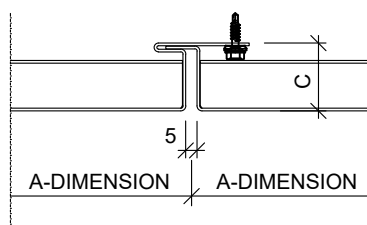

panel depth C = 25, 30 mm
material thickness t = 1.2 mm (steel)

Installation direction can be chosen -> fastening flange on the left or right

Amin = 150 mm, Bmin = 150 mm
Amax = 650 mm, Bmax = 3000 mm



Contents of drawing

Liberta Elegant 550




Corner panel

Dimensional drawing


Date	07.03.2019	Rev. date	14.07.2021	Work nr.	Drw. nr.	Rev.
Drawn by	Ruukki	Rev.	F02		RSP550E-2	c
Scale	1:10	Building			File nr.	

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

From 2-5 fastening holes, equally spaced, max c/c 750 mm
OR order specific fastening hole distance

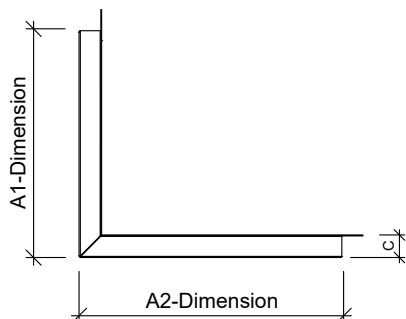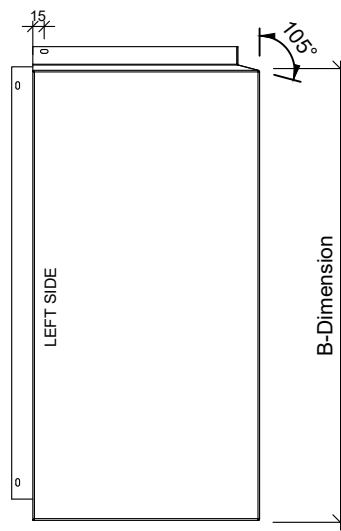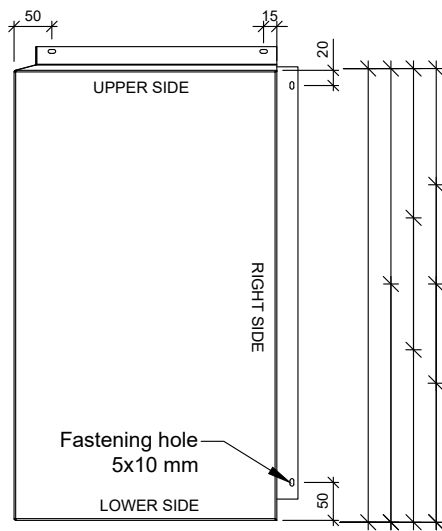


HORIZONTAL JOINT

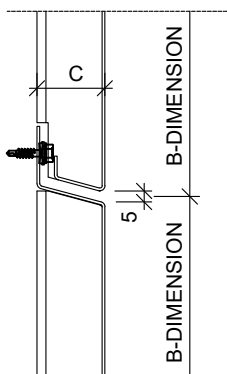


panel depth C = 25, 30 mm
material thickness t = 1,2 mm (steel)

Amin = 150 mm , Bmin = 150 mm
Amax = 650 , Bmax = 3000
A1 + A2 = max 1200 mm

VERTICAL JOINT

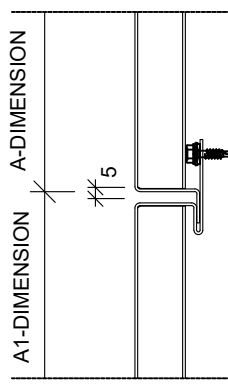

Double fastening flanges

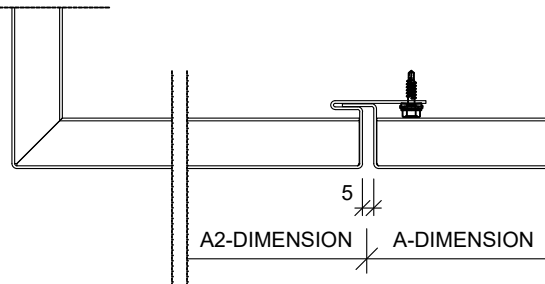



Contents of drawing

Liberta Elegant 550


Pitched panel, upper edge A

Dimensional drawing


Date	07.03.2019	Rev. date	14.07.2021	Work nr.	Drw. nr.	Rev.
Drawn by	Ruukki	Rev.	F02			
Scale	1:10	Building			File nr.	

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products


From 2-5 fastening holes, equally spaced, max c/c 750 mm
OR order specific fastening hole distance

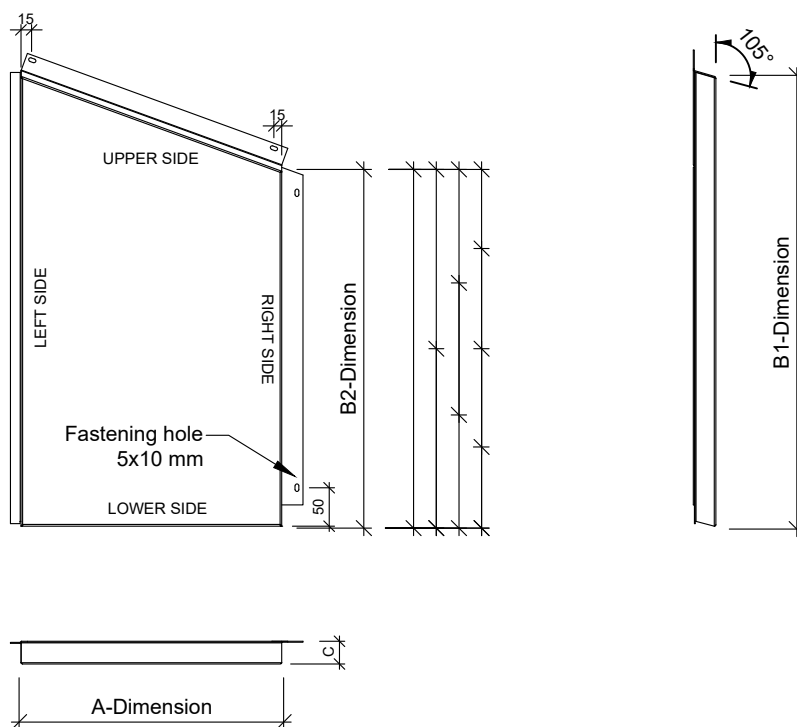

HORIZONTAL JOINT

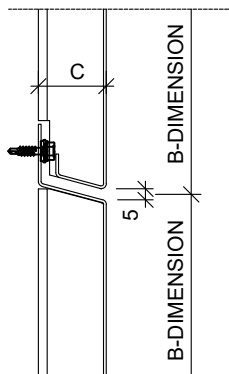

VERTICAL JOINT

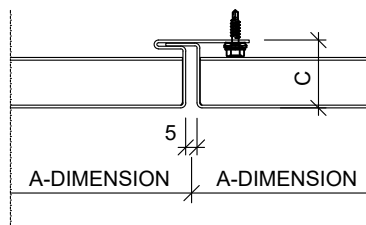

panel depth C = 25, 30 mm
material thickness t = 1,2 mm (steel)

Amin = 150 mm , Bmin = 150 mm
Amax = 650 mm , Bmax = 3000 mm



Contents of drawing

Liberta Elegant 550


Pitched panel, lower edge B

Dimensional drawing


Date	07.03.2020	Rev. date	14.07.2021	Work nr.	Drw. nr.	Rev.
Drawn by	Ruukki	Rev.	F02		RSP550E-4	c
Scale	1:10	Building			File nr.	

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products


From 2-5 fastening holes, equally spaced, max c/c 750 mm
OR order specific fastening hole distance

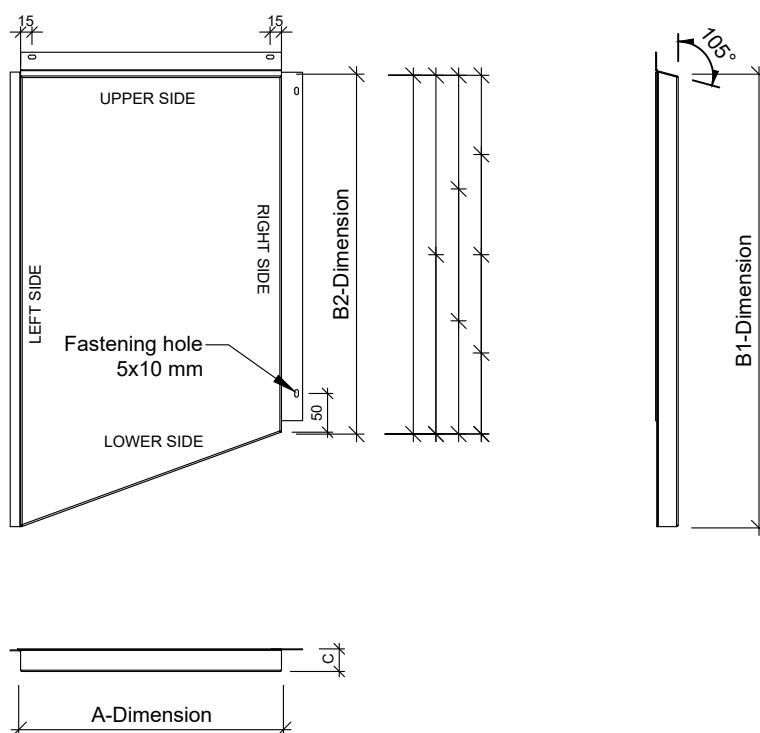

HORIZONTAL JOINT

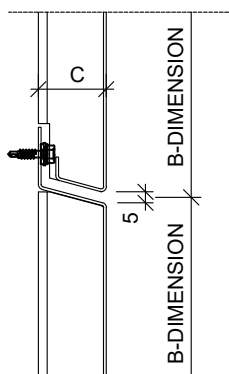

VERTICAL JOINT

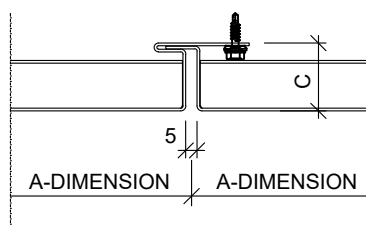

panel depth C = 25, 30 mm
material thickness t = 1,2 mm (steel)

Amin = 150 mm, Bmin = 150 mm
Amax = 650 mm, Bmax = 3000 mm



Contents of drawing

Liberta Elegant 550


Pitched panel, left vertical edge C

Dimensional drawing


Date	07.03.2020	Rev. date	14.07.2021	Work nr.	Drw. nr.	Rev.
Drawn by	Ruukki	Rev.	F02		RSP550E-5	c
Scale	1:10	Building			File nr.	

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products


From 2-5 fastening holes, equally spaced, max c/c 750 mm
OR order specific fastening hole distance

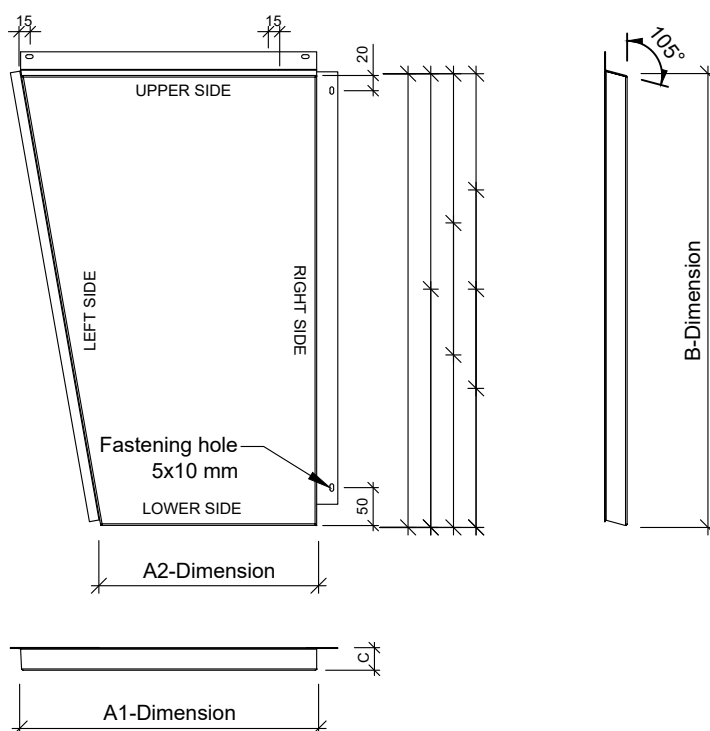

HORIZONTAL JOINT

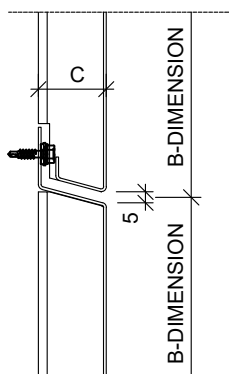

VERTICAL JOINT

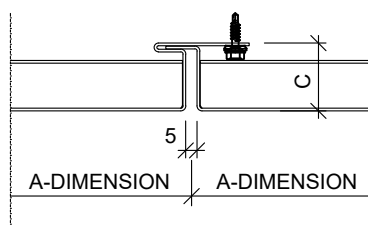

panel depth C = 25, 30 mm
material thickness t = 1,2 mm (steel)

Amin = 150 mm, Bmin = 150 mm
Amax = 650 mm, Bmax = 3000 mm



Contents of drawing

Liberta Elegant 550


Pitched panel, right vertical edge D

Dimensional drawing


Date	07.03.2019	Rev. date	17.09.2020	Work nr.	Drw. nr.	Rev.
Drawn by	Ruukki	Rev.	F02		RSP550E-6	b
Scale	1:10	Building			File nr.	

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products


From 2-5 fastening holes, equally spaced, max c/c 750 mm
OR order specific fastening hole distance

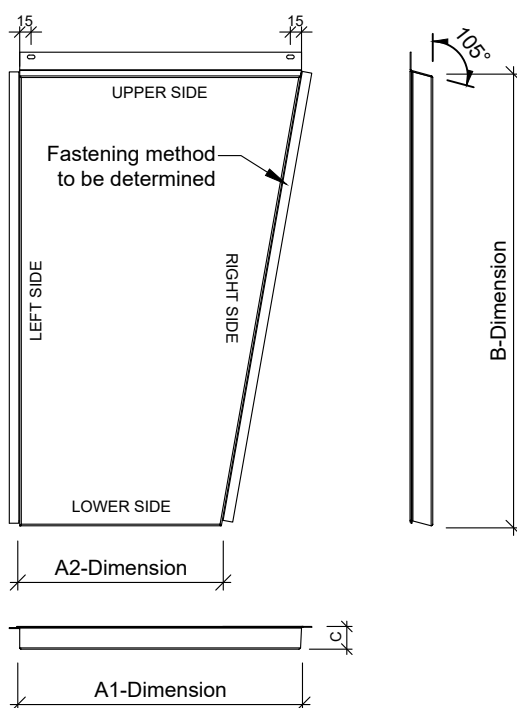

HORIZONTAL JOINT

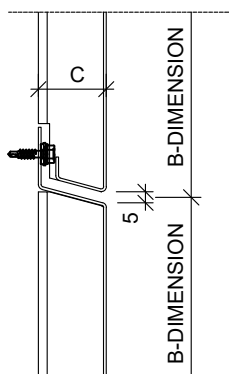

VERTICAL JOINT

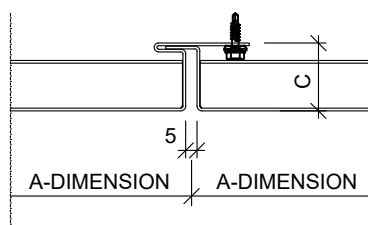

panel depth C = 25, 30 mm
material thickness t = 1,2 mm (steel)

Amin = 150 mm, Bmin = 150 mm
Amax = 650 mm, Bmax = 3000 mm



Contents of drawing

Liberta Elegant 550



U-panel

Dimensional drawing


Date	07.03.2019	Rev. date	14.07.2021	Work nr.	Drw. nr.	Rev.
Drawn by	Ruukki	Rev.	F02		RSP550E-7	c
Scale	1:10	Building			File nr.	

Copyright © Rautaruukki Corporation. Allowed only for designs with Ruukki's products

From 2-5 fastening holes, equally spaced, max c/c 750 mm
OR order specific fastening hole distance

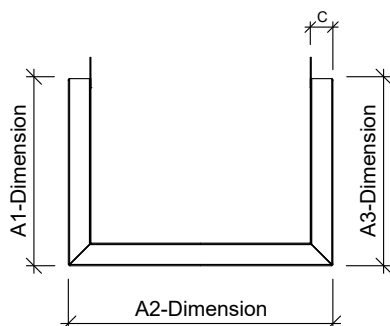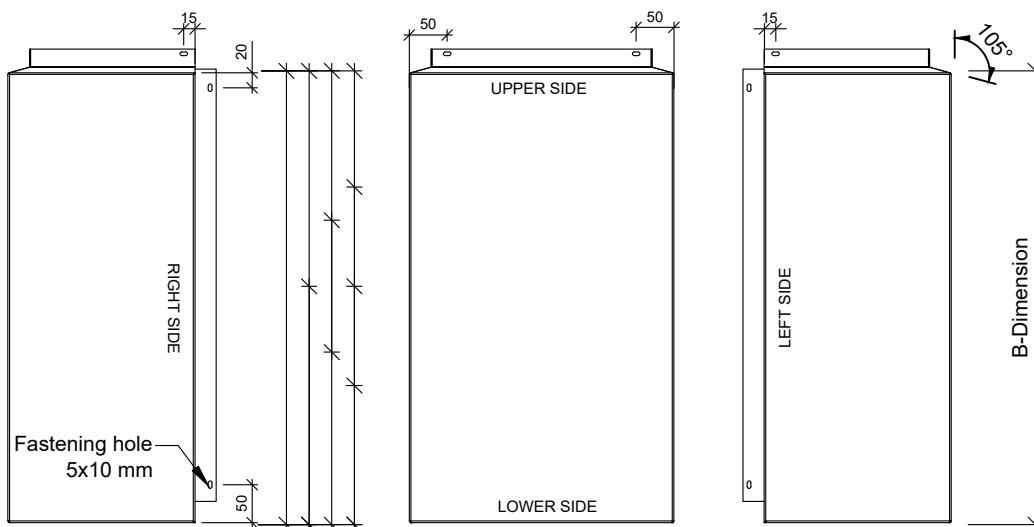

HORIZONTAL JOINT

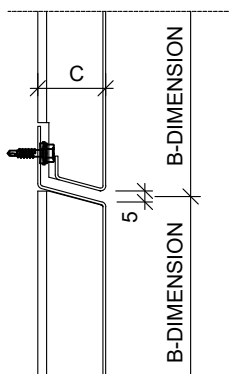

panel depth C = 25, 30 mm
material thickness t = 1,2 mm (steel)

Amin = 150 mm, Bmin = 150 mm
Amax = 650 mm, Bmax = 3000 mm
A1 + A2 + A3 = max 1200 mm
A2 ≤ A3, A2 ≤ A1

