

Roofit.Solar

Roofit.Solar Classic 553

3x12/175W/001

Extremely Weatherproof

Our solar roof is equipped to withstand any weather condition, including snow, ice, hail, and wind.

2-in-1 solution

Combining roof and solar panel into one product (2-in-1) reduces material and labor costs for both manufacturing and installation.

Built to last

Premium quality materials and a strong metal backsheet.

Warranty

25-year power warranty and 10-year product warranty.

Ideal for Sloped Roofs

Ideal photovoltaic solution for sloped roofs with minimum pitch of 10°.

Dreamed in Europe. Made in Europe.


We commit to the highest quality and European standards in the production and installation of our solar roofs.

Tried-and- tested

Installed using traditional well-known Classic lock standing seam roofing technology.

Timeless design

Accepted by authorities for protected and heritage buildings.

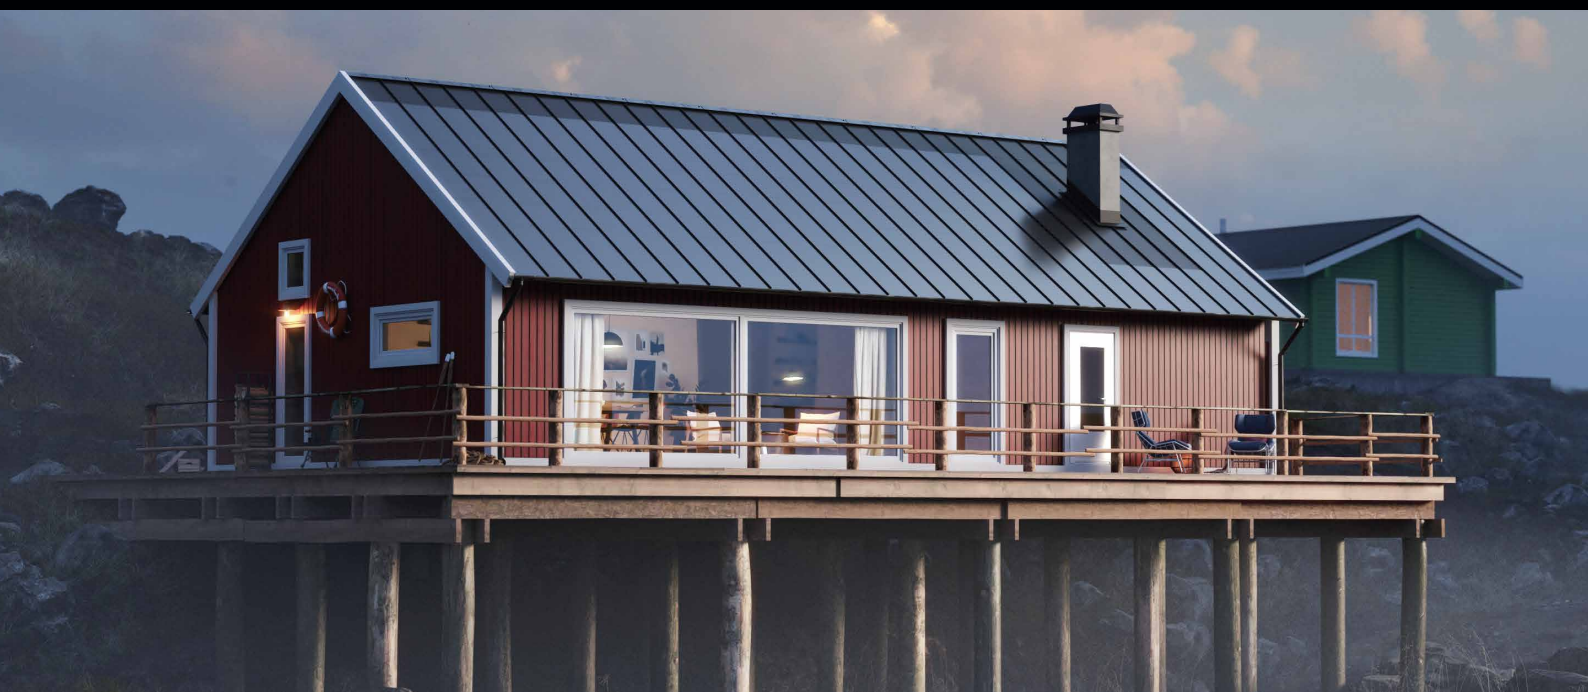

Roofit.Solar

Contact Roofit Solar Energy OÜ
Härgmäe 21, Tallinn 13525, Estonia
<http://roofit.solar>
info@roofit.solar

**Working
Conditions**

Maximum System Voltage	1000 V DC
Operating Temperature	-40 °C ... +85 °C
Maximum Series Fuse Rating	16A
Safety Class	Class II
Tested Positive Load	6000 Pa = 610 kg/m²
Tested Negative Load	2400 Pa
Impact Resistance	Hailstone up to 25mm in size and at the speed of 23m/s
Minimum Ventilation Below	50 mm
Minimum Roof Slope	10 degrees

**Mechanical
Specifications**

Cells	158,75 mm monocrystalline PERC 3x12 configuration
Front glass	3.2 mm tempered low-iron glass
Back sheet	0.6 mm galvanized steel with Pural mat coating
Encapsulant	POE
Junction boxes	3 bypass diodes, IP68, potted
Connectors	QC4.10
Cabels	4 mm² H1Z2Z2-K solar cabel lenght 700 mm
Effective roof coverage	2022 mm x 553 mm
Mounting method	Classic click lock
Weight	16.5 kg (pc) = 15.5 kg/m² (installed)

Packing

Pacaking Configuration	28 modules per pallet
Pallet (LxWxH)	2370 x 1130 x 750 mm


Certification

Designed to meet the requirements of following standards:
IEC 61215-1:2016 (PV Module Reliability)
IEC 61730-1:2016 (PV Module Safety)
EN 13501-5:2016 BROOF (t2) (Fire safety)

CAUTION: READ SAFETY AND INSTALLATION INSTRUCTIONS
BEFORE USING THE PRODUCT.



Engineering Drawings (units mm)

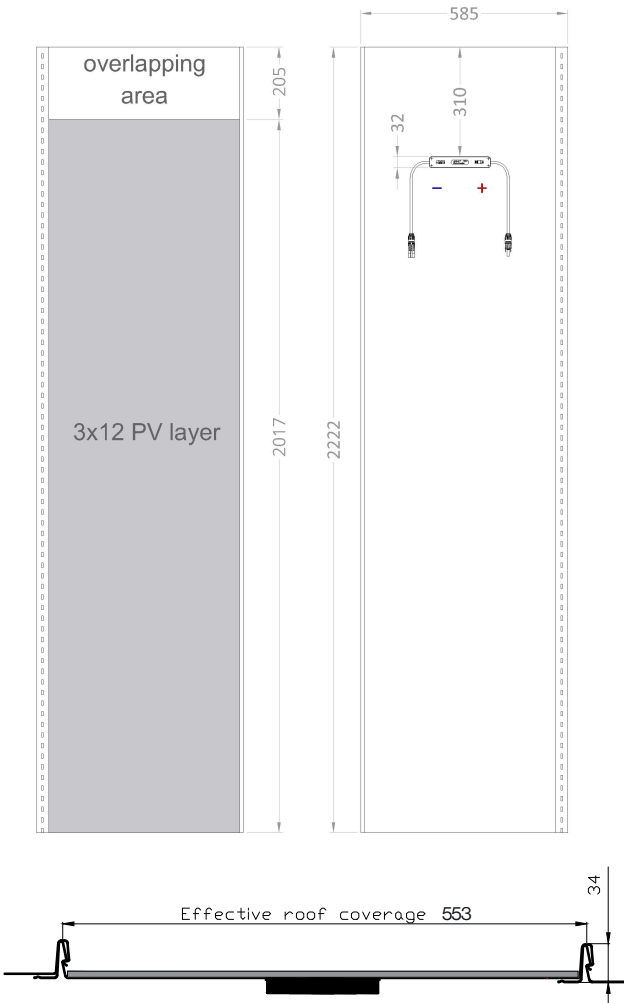

**Electrical
Characteristics**

		STC ¹	NMOT ²
Nominal Power	P _{mpp} (W)	175	116.8
MPP Voltage	V _{mpp} (V)	19.8	17.4
MPP Current	I _{mpp} (A)	8.8	6.71
Open Circuit Voltage	V _{oc} (V)	24.2	21.9
Short Circuit Current	I _{sc} (A)	9.3	7.2

Power Tolerances ±3 %
Current and Voltage Tolerances ±3 %

¹ Standard Test Conditions (irradiance 1000 W/m², cell temperature 25 °C, spectrum AM1.5)
² Nominal Module Operating Temperature (irradiance 800 W/m², air temperature 20 °C, wind 1 m/s, spectrum AM1.5)

**Thermal
Characteristics**

Temperature Coefficient of	P _{mpp}	-0.363 % /K
Temperature Coefficient of	V _{oc}	-0.276 % /K
Temperature Coefficient of	I _{sc}	0.043 % /K