



Design Panel DP H3

Sandwich-paneelidest nurgalahendus H3 on sobilik horisontaalseks paigaldamiseks. Antud paneeli on võimalik paigaldada kaarestatud geomeetriaga fassaadidele. Paneeli minimaalne painutusraadius on 4500mm. Sõltuvalt paneeli paksusest on paneel saadaval kas PIR soojustusega või mineraalvilltäitega.

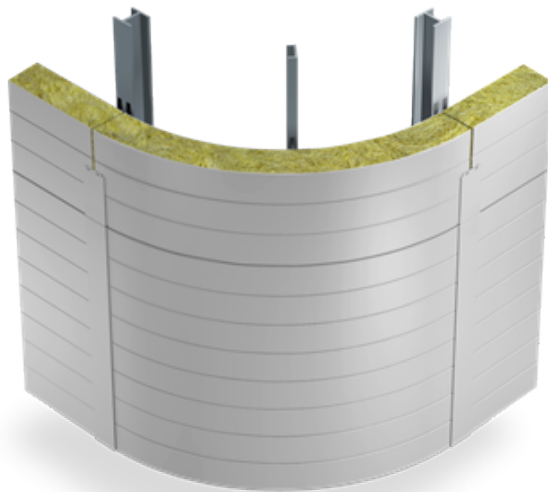

SAATKE KONTAKTITAOTLUS

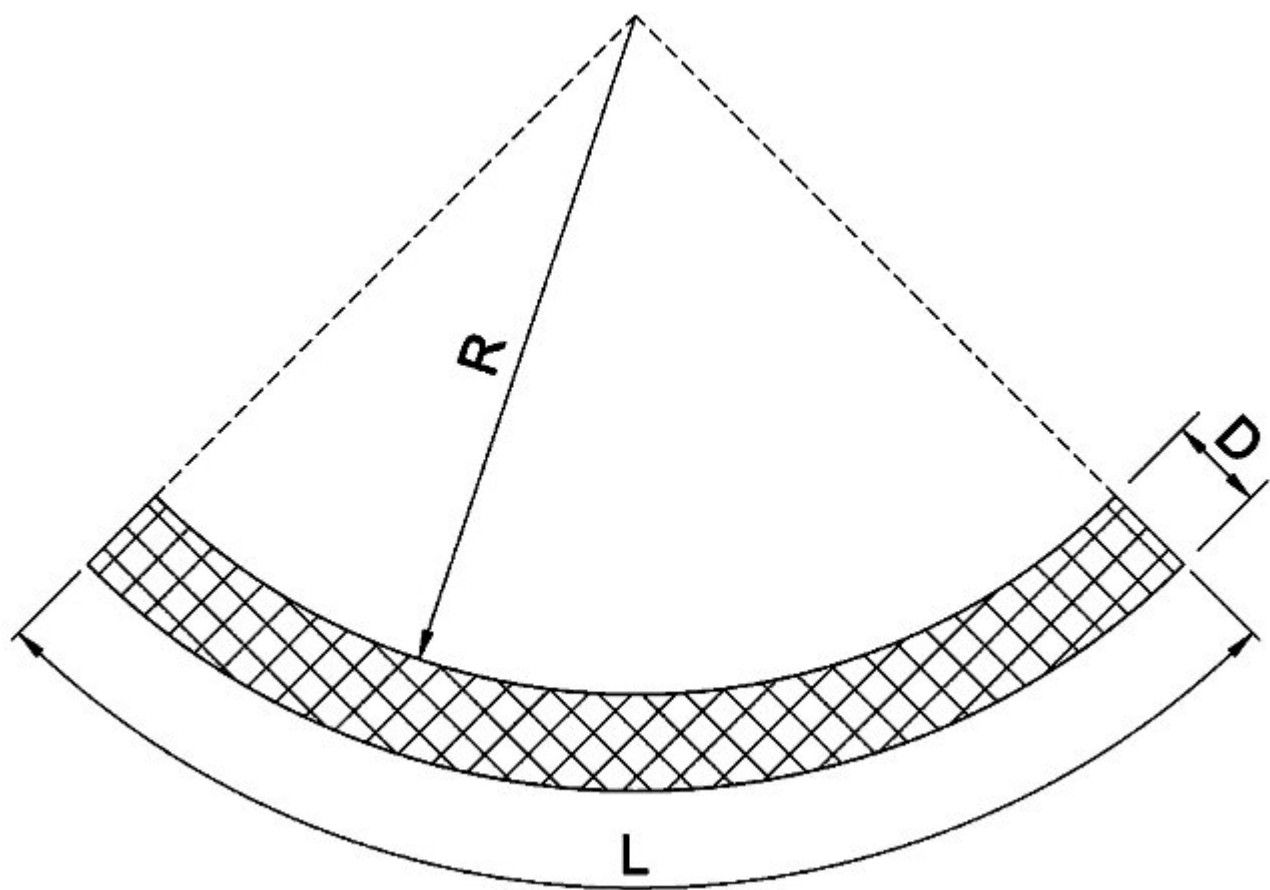

Tabel 1 – olemasolevad mõõdud

Paneeli paksus D (mm)	Max pikkus L (mm)	Min raadius R (mm)
80, 100, 110, 120, 140	6000	4500
150, 160, 170, 180, 200	3000	4500

Tabel 2 – olemasolevad DP H3 sandwich-paneelidest nurgalahenduste paksused ja soojustuse tüübid


Paksus (mm)	Soojustuse tüüp	DP H3
60	PIR	-
80	PIR	SP2B, SP2D
100	PIR	SP2B, SP2D
110	PIR	SP2B
120	PIR	SP2D, SP2E

140	PIR	-
160	PIR	-
80	mineraalvill	nSPB
100	mineraalvill	nSPB, nSPD
110	mineraalvill	nSPB
120	mineraalvill	nSPB, nSPD
140	mineraalvill	nSPB
150	mineraalvill	nSPB, nSPD
160	mineraalvill	nSPB
170	mineraalvill	nSPB
180	mineraalvill	nSPB, nSPD
200	mineraalvill	nSPB, nSPD
210	mineraalvill	-
230	mineraalvill	-


Kõik tootemadused vastavad standardile EN 14509.

Värvid ja pinnakatted


Horizontal panels Design Panels H3 can be manufactured with different coatings, profile options and colors. The availability of specific features is compliant with the options existing for corresponding standard panels. NOTE: L25 is not available on internal face.




RAL1015 RR807




RAL3013 RR774

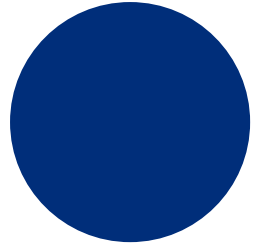


RAL5005 Signal blue




RAL6011 RR526



RAL7015 RR23

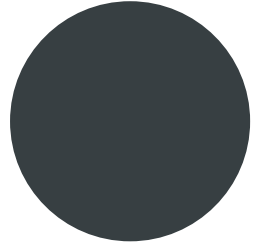


RAL7016 RR288




RAL7035 RR2B1



RAL9002 Grey white

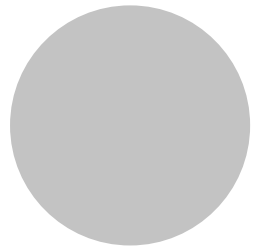

RAL9006 RR946



RAL9007 Grey aluminium



RAL9010 RR1G5