



Design Panel DP V3

Sandwich-paneelidest nurgalahendus V3 on sobilik vertikaalseks paigaldamiseks. Antud paneeli on võimalik paigaldada kaarestatud geomeetriaga fassaadidele. Paneeli minimaalne painutusraadius on 800mm. Sõltuvalt paneeli paksusest on paneel saadaval kas PIR soojustusega või mineraalvilltäitega.

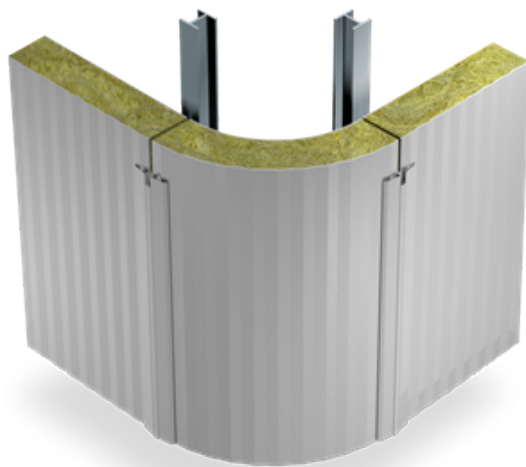

SAATKE KONTAKTITAOTLUS

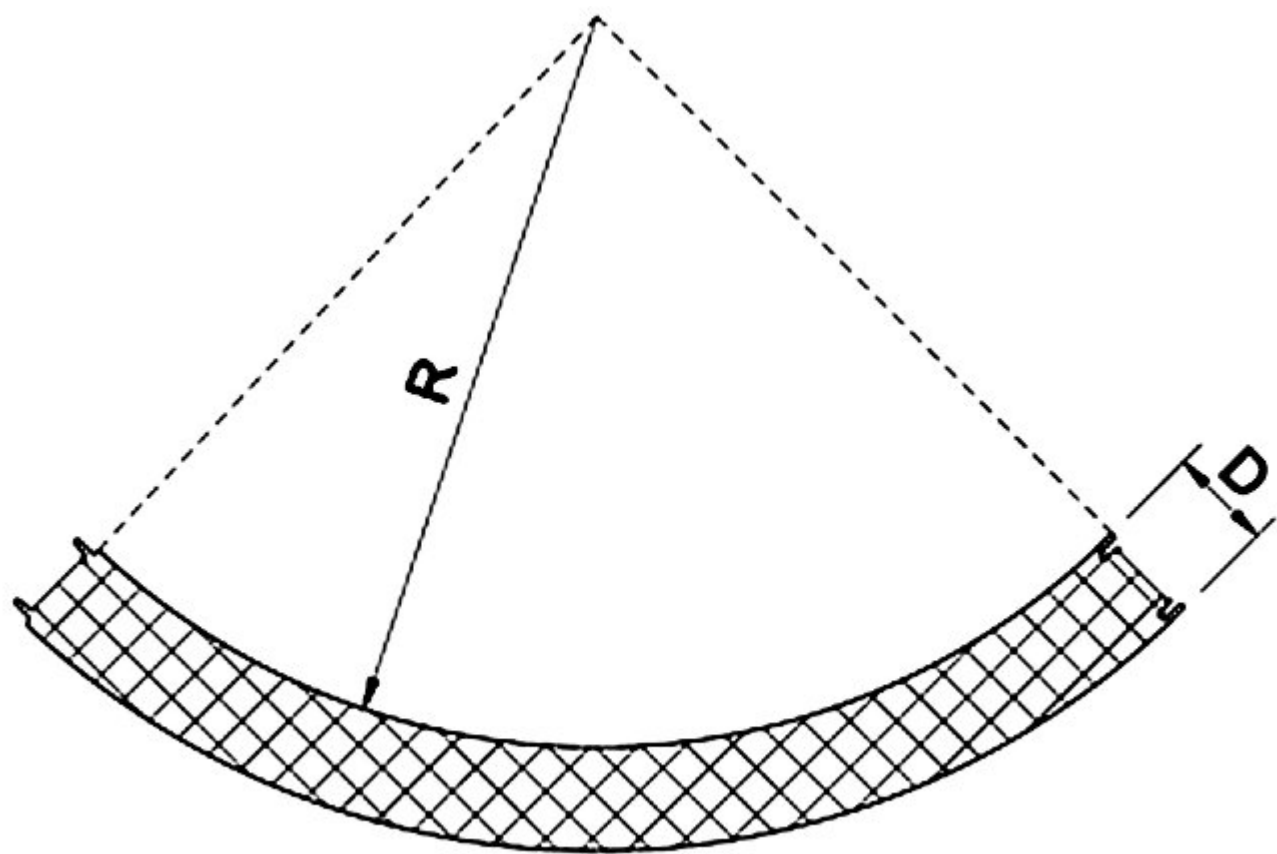

Tabel 1 – olemasolevad mõõdud

Paneeli paksus D (mm)	Max pikkus L (mm)	Min raadius R (mm)
80, 100, 110, 120, 140, 150	6000	800

Tabel 2 – olemasolevad DP V3 sandwich-paneelidest nurgalahenduste paksused ja soojustuse tüübid


Paksus (mm)	Soojustuse tüüp	DP V3
60	PIR	-
80	PIR	SP2B, SP2D
100	PIR	SP2B, SP2D
110	PIR	SP2B
120	PIR	SP2D, SP2E
140	PIR	-
160	PIR	-

80	mineraalvill	nSPB
100	mineraalvill	nSPB, nSPD
110	mineraalvill	nSPB
120	mineraalvill	nSPB, nSPD
140	mineraalvill	nSPB
150	mineraalvill	nSPB, nSPD
160	mineraalvill	-
170	mineraalvill	-
180	mineraalvill	-
200	mineraalvill	-
210	mineraalvill	-
230	mineraalvill	-


Kõik tooteomadused vastavad standardile EN 14509.

Värvid ja pinnakatted


Vertical corner panels Design Panels V3 can be manufactured with different coatings, profile options and colors. The availability of specific features is compliant with the options existing for corresponding standard panels. NOTE: L25 is not available on internal face.




RAL1015 RR807




RAL3013 RR774




RAL5005 Signal blue




RAL6011 RR526



RAL7015 RR23




RAL7016 RR288




RAL7035 RR2B1



RAL9002 Grey white



RAL9006 RR946



RAL9007 Grey aluminium



RAL9010 RR1G5