


C Purlin, Termo

Ruukki's Termo purlins offer an optimised solution for avoiding cold bridges in purlin constructions on external roofs or walls.

Cold bridges can be minimised by the slotted hole system on the purlins' web. To optimise the design, use our PurCalc software.


Applications:

- Industrial construction
- · Hall and warehouse construction
- · Renovation projects

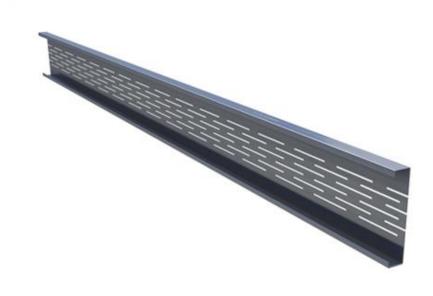

SEND CONTACT REQUEST

Properties



Model name	C Purlin, Termo			
Height	150, 175, 200, 225, 250 mm			
Thickness	1.0, 1.2, 1.5, 2.0 mm			
Section type	C-sections			
Minimum length	1600 mm			
Maximum Length	15000 mm			
Material	Hot galvanized steel sheet. Steel quality S350GD+Z275 according to EN 10346. Applications in environments with corrosivity: C2 according to the EN ISO 12944-2.			
Tolerances	Dimensions and shape according to EN 1090-4, material thickness according to EN 10143			

Cross section geometries: Termo Purlin C

Type of purlin	Termo perforation row quantity (pcs)	Extra conductance (W/mK)	Thickness (mm)	H (mm)	A (mm)	B (mm)	C (mm)	Weight (kg/m)
----------------	--------------------------------------	--------------------------------	-------------------	-----------	-----------	-----------	--------	---------------

LPT- C150	8	0,024	1	150	50	-	>=14.00	2.05
		0,026	1.2				>=14.80	2.46
		0,029	1.5				>=15.00	3.07
		0,034	2				>=17.00	4.10
LPT- C175	8	0,025	1	175	50	-	>=12.50	2.25
		0,027	1.2				>=13.30	2.69
		0,030	1.5				>=14.50	3.37
		0,035	2				>=16.50	4.49
LPT- C200	8	0,026	1	200	50	-	>=13.00	2.44
		0,028	1.2				>=13.80	2.93
		0,031	1.5				>=15.00	3.66
		0,036	2				>=17.00	4.88
LPT- C225	10	0,021	1	225	50	-	>=15.50	2.68
		0,023	1.2				>=16.30	3.21
		0,026	1.5				>=17.50	4.02
		0,031	2				>=19.50	5.35
LPT- C250	10	0,022	1	250	50	-	>=13.00	2.83
		0,024	1.2				>=13.80	3.40
		0,027	1.5				>=15.00	4.25
		0,032	2				>=17.00	5.67

Design tools



PurCalc® software for designing purlins

With the PurCalc® software, the user can design roof and wall purlins produced by Ruukki. The purlins are designed as continuous beams. The purlin type must be the same for the whole structure, but the thickness may vary. One of the purlin flanges is assumed to be supported with the profile sheet. The other flange may be either supported or unsupported. Basic loads such as uniform snow load and wind load can be easily given with a few parameters. Also, more complicated load types, such as snowdrift loads, can be given. The software calculates the necessary fasteners for the supporting structure as well.

Go to PurCalc® software



Download BIM objects to your desktop

ProdLib brings Ruukki products as BIM models directly to your desktop in 3D form for design programs AutoCAD, Autodesk Revit, Archicad and Tekla Structures. Product libraries compile all necessary design models and detailed drawings in one place. Library updates are automatically notified, so as a user you can be sure that your product information is constantly up to date. ProdLib can also be used as a standalone desktop application.

Go to BIM library


Ordering

Please provide the following information when ordering:

- Type of purlin
- Thickness
- Length
- Number.

In case of pre-punched purlins, please send us purlin drawings showing the location of the holes.

Reference point for distances = cutting point

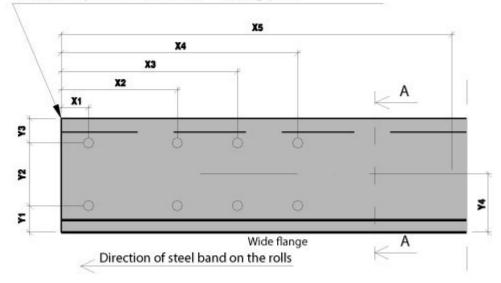

Pre-punching service

Purlins can be pre-punched in our factory. This makes construction on-site faster and easier. The standardised sizes and locations of holes for fixing screws are presented below. Please contact us for additional information about the pre-punching possibilities.

Holes are made during production at continuous line.

Additional information:


- Max. material thickness 3mm (for ø 60mm max. material thickness 2mm)
- Holes can be made in a row
- Oval and rectangular holes can be rotated by 90°.

Type of hole	Diameter (mm)	Rotation (°)
Round	7	-
Round	10	-
Round	12	-
Round	14	-
Round	16	-
Round	18	-
Round	20	-

D 1	00	
Round	22	-
Round	26	-
Round	60	-
Oval	12×24	90
Oval	14×24	90
Oval	16×35	90
Oval	18×31.7	90
Oval	18×35	90
Oval	20×35	90
Rectangular	5×25	90

Technical documents

Here you can find all technical documents related to Ruukki's light weight purlins. Documents are organised by document type. Click to enter document library.

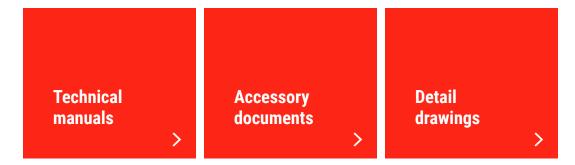

Certificates and approvals

Here you can find all certificates and approvals related to Ruukki's light weight purlins. Documents are organised by document type. Click to enter document library.

