

# Invisible outer corner flashing EA1ECI2


Invisible outer corner flashing EA1ECI2 for listing the vertical seam between panels (SPA 300) in the outer corner without visible fixing screws. Suitable for SPA panels with a thickness of 300 mm. Flush mounting washers are used to fasten the panels according to Invisible flashing details and instructions.

The Invisible EA1EXB6 vertical corner flashing is required to attach this list.



[SEND CONTACT REQUEST](#)

# Properties

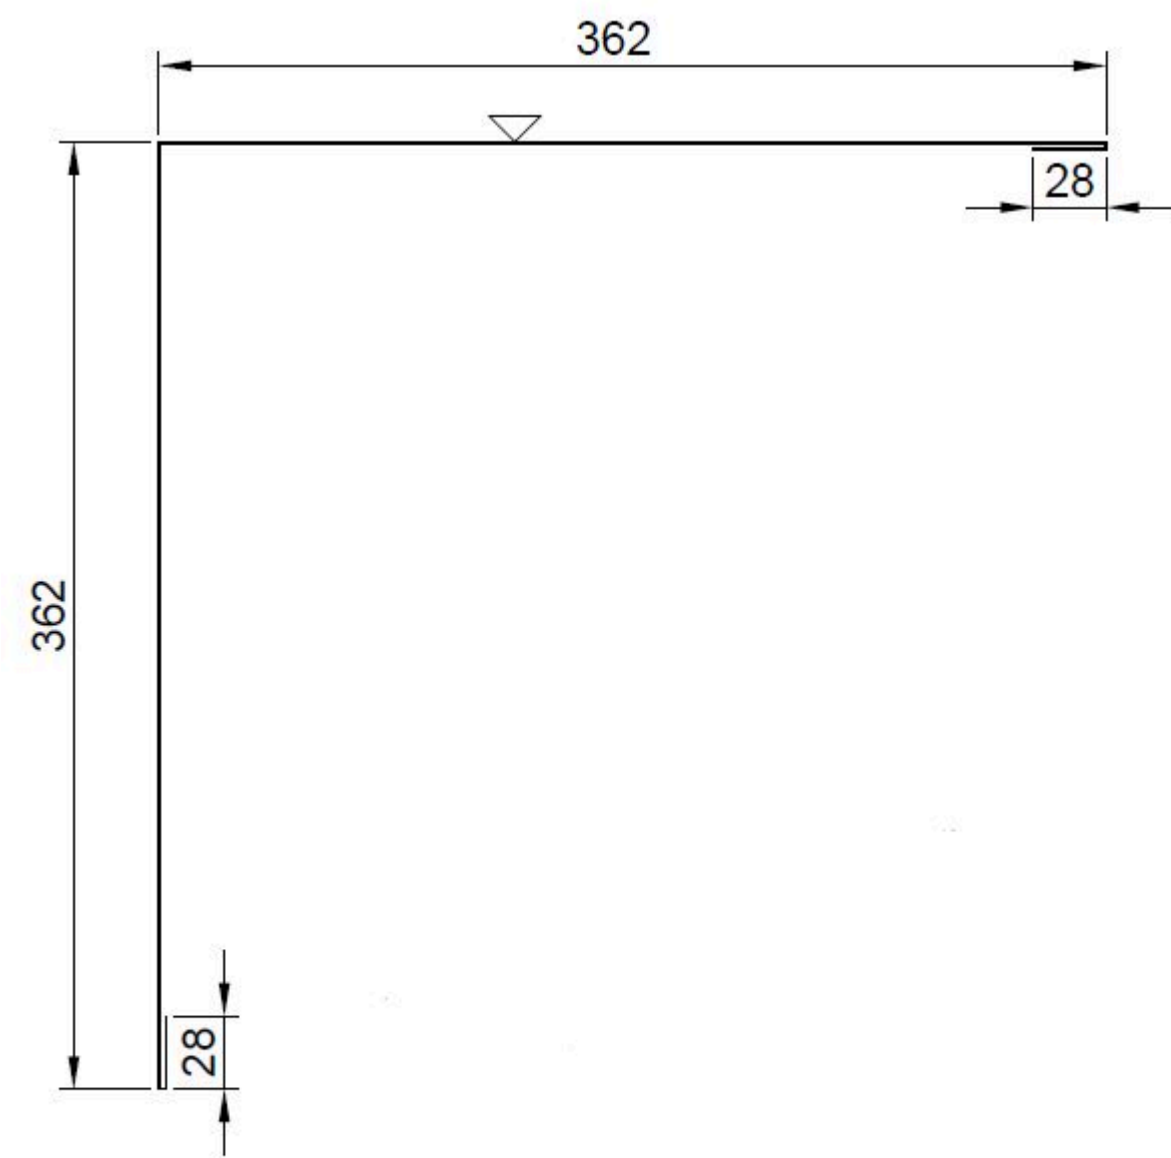

| Product name       | Invisible outer corner flashing EA1ECI2 |
|--------------------|-----------------------------------------|
| Length             | 1245 mm                                 |
| Material thickness | 0,6 mm                                  |
| Weight             | 4.99 kg/pcs                             |

Note:


- For unobtrusive listing of the vertical seam between the SPA panels (230 mm) in the outer corners of the building
- At the top of the list there are three mounting holes / side, of which to only one becomes a screw (1 screw / side).
- Recommended screw type: List screw S1E42013GE 1000.
- All list screws are hidden after installation.
- The Invisible EA1EXB4 vertical base flashing is required to attach this list.
- The length of the list includes an overlap of 40 mm.

## Coatings, profiling and colors


| Coating            | Thickness (mm)                                             |
|--------------------|------------------------------------------------------------|
| GreenCoat Pural BT | RR20, RR21, RR22, RR23, RR29, RR33, RR35, RR40, RR41, RR45 |
| Polyester          | RR20, RR21, RR946                                          |




RR20 White




RR21 Light Grey



RR22 Grey




Graphite ~ RAL 7024



RR29 Red



RR33 Black



RR35 Blue




RR40 Silver



RR41 Dark silver



RR45 Metallic graphite



RR946 Metallic silver