


Ruukki PLX

Ruukki PLX offers the highest level of durability for standing-seam systems. Product is recommended to be used in all premium tinsmith applications. It is highly formable, even by hand, and has practically no spring-back, which allows for very tight folding.

Ruukki PLX: technical warranty 50 years and aesthetical warranty 25 years.

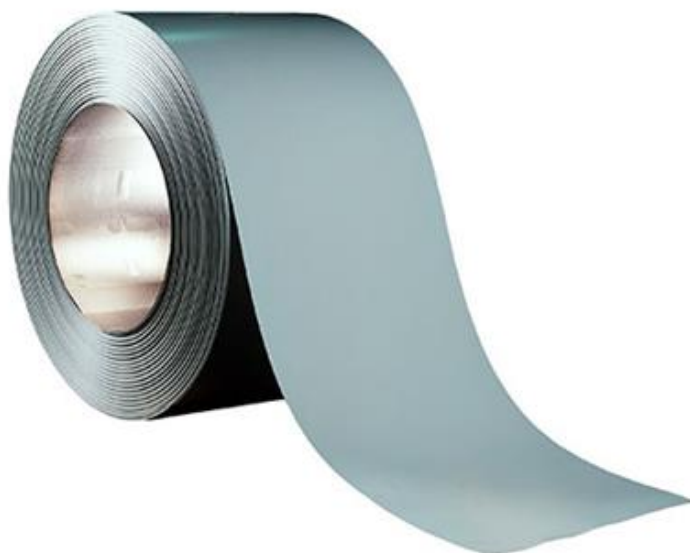


REQUEST QUOTATION

Properties

Sales unit	m ²
Other technical information	Ruukki PLX: technical warranty 50 years and aesthetical warranty 25 years. Coating – GreenCoat Pural BT. Coating thickness, nominal (primer + top coat) 50 µm. Material – SSAB DX54D+Z350.

- Mass of zinc 350 g/m²
- Min steel thickness 0.6 mm
- Steel width 670 mm


Coatings and colors



RR29 Red



RR887 Chocolate Brown



RR2H3 Anthracite



RR23 Dark Grey



RR33 Black

Download documents

