
Ruukki PLX

Ruukki PLX offers the highest level of durability for standing-seam systems. Product is recommended to be used in all premium tinsmith applications. It is highly formable, even by hand, and has practically no spring-back, which allows for very tight folding.

Ruukki PLX: technical warranty 50 years and aesthetical warranty 25 years.

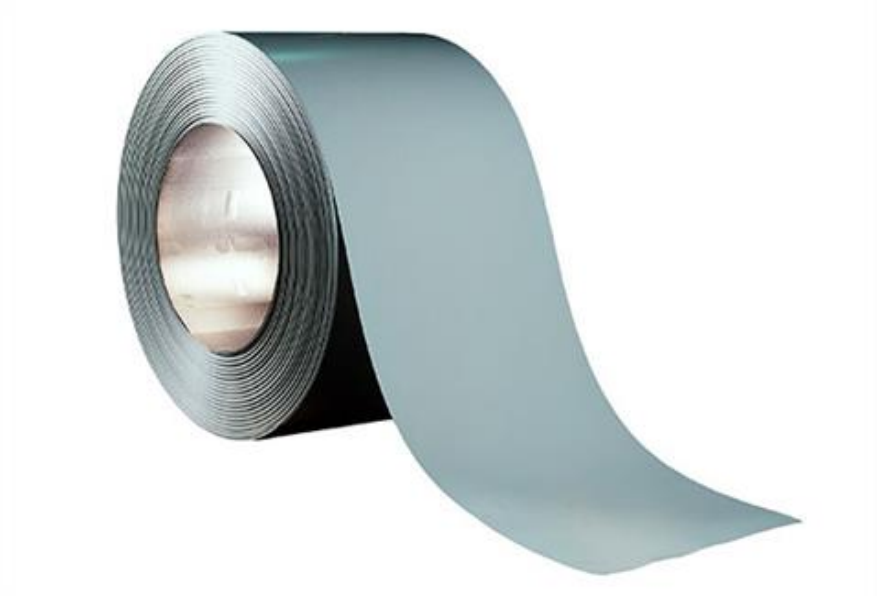

REQUEST QUOTATION


The information on our website is accurate to the best of our knowledge and understanding. Although every effort has been made to ensure accuracy, the company cannot accept any responsibility for any direct or indirect damages resulting from possible errors or incorrect application of the information of this publication. We reserve the right to make changes.

Properties

Sales unit	m^2
Other technical information	**Ruukki PLX:** technical warranty 50 years and aesthetical warranty 25 years. **Coating** – GreenCoat Pural BT. Coating thickness, nominal (primer + top coat) 50 µm. **Material** – SSAB DX54D+Z350.

- Mass of zinc 350 g/m^2
- Min steel thickness 0.6 mm
- Steel width 620 mm


Coatings and colors



RR29 Red



RR887 Chocolate Brown



RR2H3 Anthracite



RR23 Dark Grey



RR33 Black

Download documents