

# Sandwich panel nSPB WE Energy

Sandwich panel **nSPB WE Energy** is available in thicknesses 150 - 230 mm.

With precise and Ruukki specific manufacturing tolerances, and factory-fitted seals on the panel joints, the Ruukki® Energy panel structure with its seams forms a very airtight solution. Together with Ruukki Airtightness package it's possible to achieve excellent airtightness to the entire building. This can decrease energy costs and CO2 emissions up to 30%. [Read more on airtightness package](#). Using Ruukki's solutions you can receive more credits in **LEED** and **BREEAM** certification systems.

It is a perfect solution for most buildings and structures, combining **high quality** with **very good technical properties**.

The filling consisting of non-combustible and environmentally friendly soft mineral wool with **low thermal conductivity coefficient** ensures **very good thermal insulation** of this panel. Properly milled core increases air-tightness and provides **high sound insulation**.

Optionally, on request, **nSPB WE Energy** sandwich panel can be delivered as FM Approved product with a certificate granted by the world-biggest insurance company FM Global. The global certificate received based on 4880 and 4881 standards confirms that a building's envelope made of these sandwich panels from Ruukki ensures the highest safety level in case of fire or hurricane.

For all needed information about FM Approved panels, please contact Ruukki Sales.



## Application:

- External walls (standard fix)

**This product is optionally available with following sustainable features:**

- Steel facings made of recycled steel (SSAB Zero) for significantly lower CO<sub>2</sub> emissions and high circularity (Ruukki LowCarbon)
- Optimized insulation for lower CO<sub>2</sub> emissions (Ruukki LowCarbon)
- Air tightness package for lower CO<sub>2</sub> emissions during building use



[SEND CONTACT REQUEST](#)

The information on our website is accurate to the best of our knowledge and understanding. Although every effort has been made to ensure accuracy, the company cannot accept any responsibility for any direct or indirect damages resulting from possible errors or incorrect application of the information of this publication. We reserve the right to make changes.

# Properties

|                           |                                                      |
|---------------------------|------------------------------------------------------|
| Model name                | Sandwich panel nSPB WE Energy                        |
| Standard module width     | 1100 mm                                              |
| Optional module width (B) | (B) 1000 mm; (A) 1200 mm (D = 150, 170, 180, 200 mm) |
| Minimum length            | 2000 mm                                              |
| Maximum Length            | 12000 mm                                             |
| External facing thickness | 0,5 mm *<br>0,6 mm                                   |
| Internal facing thickness | 0.5 mm                                               |
| External Fire Exposure    | NRO                                                  |
| Air Tightness             | q50=0,01 m3/hm2 (pressure and suction)               |

| Thickness D (mm)                                                              | 150       | 160       | 170       | 180       | 200       | 210      | 230       |
|-------------------------------------------------------------------------------|-----------|-----------|-----------|-----------|-----------|----------|-----------|
| Weight (kg/m <sup>2</sup> )                                                   | 23.9      | 24.8      | 25.7      | 26.6      | 28.4      | 29.2     | 31.1      |
| U-value (W/m <sup>2</sup> K)                                                  | 0.26      | 0.24      | 0.23      | 0.22      | 0.19      | 0.19     | 0.17      |
| Sound insulation Rw (dB)                                                      | 29        | 29        | 29        | 30        | 30        | 30       | 30        |
| Reaction to fire                                                              | A2-s1, d0 | A2-s1, d0 | A2-s1, d0 | A2-s1, d0 | A2-s1, d0 | A2-s1,d0 | A2-s1, d0 |
| GWP-total, A1-A3 (kg CO <sub>2</sub> ◇/m <sup>2</sup> )                       | 31.7      | 32.1      | 32.4      | 32.8      | 33.5      | 33.9     | 34.6      |
| GWP-total, A1-A3 (kg CO <sub>2</sub> e/m <sup>2</sup> ) for Ruukki® LowCarbon | 17.0      | 17.3      | -         | 18.0      | 18.7      | 19.1     | 19.8      |

| Wall fire resistance values & max span horizontal / vertical orientation (m): | 150       | 160       | 170       | 180       | 200       | 210       | 230       |
|-------------------------------------------------------------------------------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| EI 30                                                                         | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 |
| EI 60                                                                         | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 |

|        |           |           |           |           |           |           |           |
|--------|-----------|-----------|-----------|-----------|-----------|-----------|-----------|
| EI 90  | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 |
| EI 120 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 | 7.5 / 7.5 |
| EI 180 | 4.0 / -   | 4.0 / -   | 4.0 / -   | 6.0 / -   | 6.0 / -   | 6.0 / -   | 6.0 / -   |

Detailed information regarding the application of fire resistance ratings can be obtained from Ruukki Sales.

All properties are declared in accordance with EN 14509 and related standards.

## Coatings and colors

### Materials

| Facing    | Coating                     | Gloss level (GU) | Corrosion class | UV resistance | Colours                                                                                                                                                                                                                                                                                                                              |
|-----------|-----------------------------|------------------|-----------------|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| External  | GreenCoat Pural BT Satin    | 20               | C4              | Ruv4-5        | RAL9010 (RR126)                                                                                                                                                                                                                                                                                                                      |
| External  | GreenCoat Pural BT Metallic | 40               | C4              | Ruv4          | RAL9006 (RR40), RAL9007 (RR41)                                                                                                                                                                                                                                                                                                       |
| External* | Polyester                   | 35               | C3              | Ruv2-3        | RAL1015 (RR807), RAL1021, RAL2003, RAL3000 (RR770), RAL3009 (RR29), RAL3013 (RR774), RAL5003 (RR4F8), RAL5005 (RR4A8), RAL5012 (RR408), RAL6011 (RR526), RAL6018 (RR5G8), RAL7015 (RR23), RAL7016 (RR288), RAL7035 (RR2B1), RAL7040 (RR287), RAL9002 (RR1G6), RAL9003 (RR106), RAL9006 (RR946), RAL9007, RAL9010 (RR1G5), Golden Oak |
| Internal  | Polyester                   | 35               | C3              | -             | RAL9002 (RR1G6), RAL9010 (RR1G5)                                                                                                                                                                                                                                                                                                     |

\*For optional modular width A = 1200 mm only a polyester coating in the following colors RAL 9002 (RR1G6), RAL 9010 (RR1G5), RAL 7035 (RR2B1), RAL 7016 (RR288), RAL9006 (RR946), RAL 9007 is available.

UV resistance describes how well the coating is able to keep its original colour and gloss levels in accordance with EN10169. The higher the class, the better the resistance.

Corrosivity categories describe the outdoor climate conditions in accordance with EN12944. The higher the category, the more corrosive environment.


**Primary colors**




RAL9010 Pure white RR1G5




RAL9002 Grey white RR1G6




RAL7035 Light grey RR2B1




RAL9006 White aluminium RR946



RAL9007 Grey aluminium



RAL7015 Slate grey RR23




RAL7016 Anthracite grey RR288


**Complementary colors**




RAL9003 Signal white RR106




RAL1015 Light ivory RR807




RAL7040 Window grey RR287




RAL5005 Signal blue




RAL5003 Sapphire blue RR4F8




RAL 5012 Light blue RR408




RAL3000 Flame Red RR770




RAL3013 Tomato red RR774




RAL3009 Oxide red RR29




RAL6011 Reseda green RR526



RAL 6018 Yellow green RR5G8



RAL2003 Pastel orange




RAL1021 Colza yellow



Golden oak

Profile options




Ribbed R28




Ribbed R500




Ribbed R250



Linear L25




Linear L



Micro M



Ribbed R275



Ribbed R550



Flat F

| Modular width | Facing   | Profile options               |
|---------------|----------|-------------------------------|
| 1100 mm       | External | L, L25, M, R28, R275, R550, F |
|               | Internal | L, L25, F                     |
| 1000 mm (B)   | External | L, L25, M, R28, R250, R500, F |
|               | Internal | L, L25, F                     |
| 1200 mm (A)   | External | L, M                          |
|               | Internal | L                             |

## Design tools



### Traypan® software for designing sandwich panels

With TrayPan®, you can design metal faced sandwich panels made by Ruukki. A panel structure can be designed as a single- or multi-span construction. You can easily give, with a few parameters, both suction and pressure loads caused by the wind. The application also calculates the necessary fasteners.

[Go to Traypan®](#)



### Download BIM objects to your desktop

ProdLib brings Ruukki products as BIM models directly to your desktop in 3D form for design programs AutoCAD, Autodesk Revit, Archicad and Tekla Structures. Product libraries compile all necessary design models and detailed drawings in one place. Library updates are automatically notified, so as a user you can be sure that your product information is constantly up to date. ProdLib can also be used as a standalone desktop application.

[Go to BIM library](#)

## Technical documents

Here you can find all technical documents related to Ruukki's sandwich panels. Documents are organised by document type. Click to enter document library.



**Product  
descriptions**



**Accessory  
documents**



**Load tables**



**Installation  
instructions**



**Maintenance  
instructions**



**Sound  
insulation  
values**



**Detail  
drawings**



## Certificates and approvals

Here you can find all certificates and approvals related to Ruukki's sandwich panels. Documents are organised by document type. Click to enter document library.

**Declaration of  
performance**



**Environmental  
product  
declaration**



**Intruder  
resistance  
certificate**




**M1 Emission  
Classification**



---

## Visualization tool

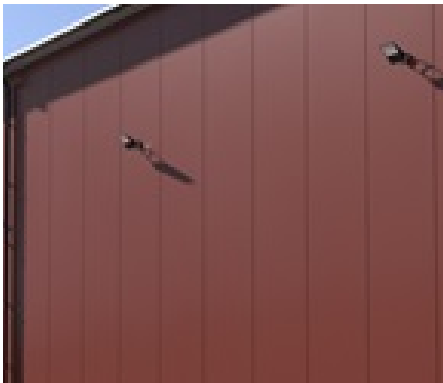

### Get inspired with our Sandwich Panel visualization tool

With our interactive Visualization tool for Ruukki sandwich panels, you can easily explore and customize the perfect combination for your building project.

[Go to visualization tool](#)