

Sandwich panel SPA EE for external walls

Sandwich panel SPA EE is available in thicknesses 202 - 300.

It is a perfect solution for most buildings and structures, combining high quality with very good technical properties. New lightweight core ensures excellent insulation properties.

With the filling consisting of non-combustible, lightweight and environmentally friendly mineral wool, this sandwich panel meets the insulation regulations in Scandinavia.

Application:

External walls (standard fix)



SEND CONTACT REQUEST

Properties

Model name	Sandwich panel SPA EE for external walls
Standard module width	1200 mm
Minimum length	2000 mm
Maximum Length	13499 mm
External facing thickness	0.6 mm
Internal facing thickness	0.5 mm

Thickness D (mm)	200+	230	300
Weight (kg/m²)	24.9	27.1	32.4
U-value (W/m ² K)	0.18	0.16	0.12
Sound insulation Rw (dB)	28	28	26
Reaction to fire	A2-s1. d0	A2-s1. d0	A2-s1. d0
GWP-total, A1-A3 (kg CO₂∜/m²)	31,9	32,6	34,7
GWP-total, A1-A3 (kg CO2e/m²) for Ruukki® LowCarbon	-	17,9	-

Wall fire resistance values & max span horizontal / vertical orientation (m):	200+	230	300
EI 30	7.5 / -	7.5 / -	7.5 / -
EI 60	7.5 / -	7.5 / -	7.5 / -
EI 90	7.5 / -	7.5 / -	7.5 / -
EI 120	7.5 / -	7.5 / -	7.5 / -
EI 180	4.0 / -	4.0 / -	4.0 / -

Detailed information regarding the application of fire resistance ratings can be obtained from Ruukki Sales.

All properties are declared in accordance with EN 14509 and related standards.

Coatings and colors

Materials

Facing	Coating	Gloss level (GU)	Corrosivity category	UV resistance	Colours
External	GreenCoat Pural BT Satin	20	C4	Ruv4-5	RR20, RR21, RR22, RR23, RR29, RR33, RR35
External	GreenCoat Pural BT Metallic	40	C4	Ruv4	RR40, RR41, RR45
External	Polyester	35	C3	Ruv2-3	RR20, RR21, RR23, RR946
Internal	Polyester	35	C3	-	RR20
Internal	Foodsafe laminate *	11	C4	-	White

*) optional material

UV resistance describes how well the coating is able to keep its original colour and gloss levels in accordance with EN10169. The higher the class, the better the resistance.


Corrosivity categories describe the outdoor climate conditions in accordance with EN12944. The higher the category, the more corrosive environment.




RR20 Winter White



RR21 Pebble Grey



RR22 Stone Grey

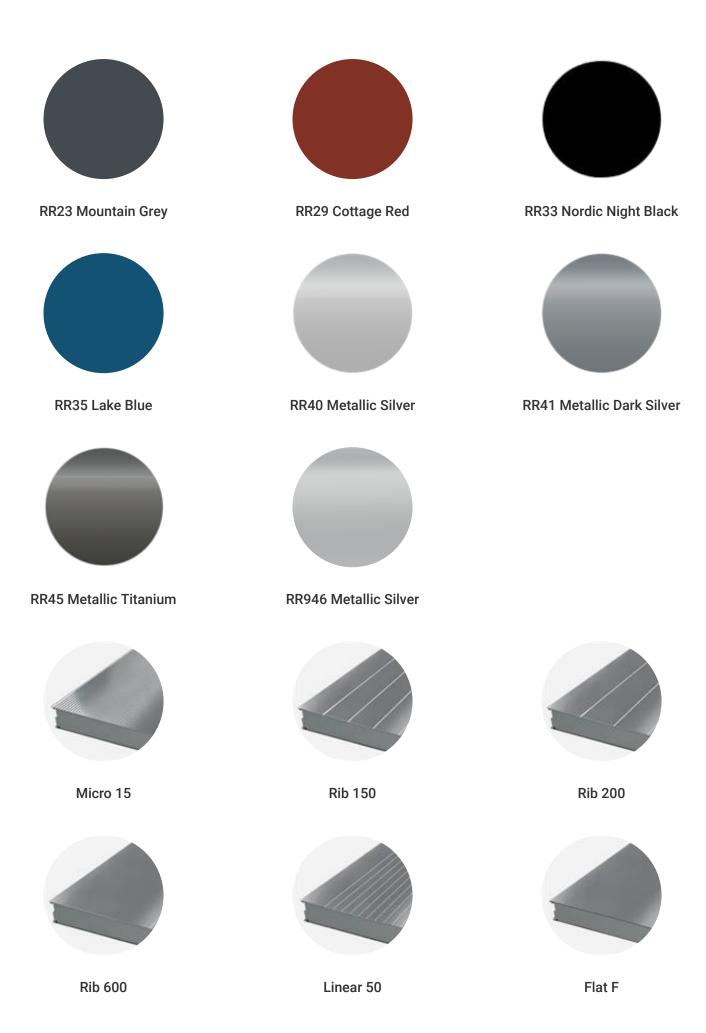

Design tools



Traypan® software for designing sandwich panels

With TrayPan®, you can design metal faced sandwich panels made by Ruukki. A panel structure can be designed as a single- or multi-span construction. You can easily give, with a few parameters, both suction and pressure loads caused by the wind. The application also calculates the necessary fasteners.

Go to Traypan®




Download BIM objects to your desktop

ProdLib brings Ruukki products as BIM models directly to your desktop in 3D form for design programs AutoCAD, Autodesk Revit, Archicad and Tekla Structures. Product libraries compile all necessary design models and detailed drawings in one place. Library updates are automatically notified, so as a user you can be sure that your product information is constantly up to date. ProdLib can also be used as a standalone desktop application.

Go to BIM library

Technical documents

Here you can find all technical documents related to Ruukki's sandwich panels. Documents are organised by document type. Click to enter document library.

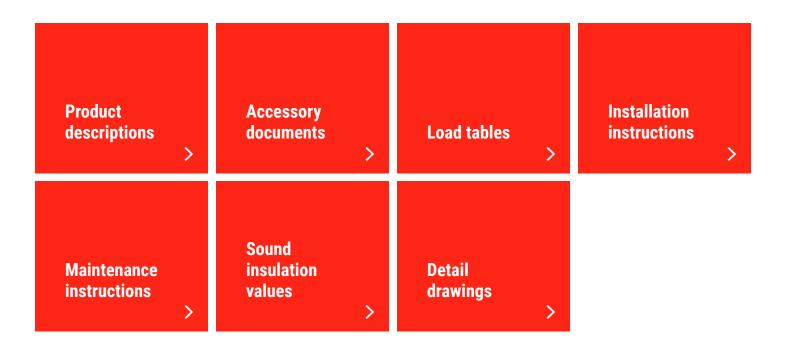

Certificates and approvals

Here you can find all certificates and approvals related to Ruukki's sandwich panels. Documents are organised by document type. Click to enter document library.



Visualization tool



Get inspired with our Sandwich Panel visualization tool

With our interactive Visualization tool for Ruukki sandwich panels, you can easily explore and customize the perfect combination for your building project.

Go to visualization tool