

# Sandwich panel SPA I for internal wall

Sandwich panel **SPA I** is available in thicknesses 100 - 150 mm.

This product, made with the use of advanced production processes, offers **optimal performance** of the designed solution.


With the filling consisting of non-combustible and environmentally friendly hard mineral wool, this sandwich panel ensures high **fire resistance**.

## Application:

- Internal walls

**This product is optionally available with following sustainable features:**

- Steel facings made of recycled steel (SSAB Zero) for significantly lower CO<sub>2</sub> emissions and high circularity - available as Ruukki LowCarbon

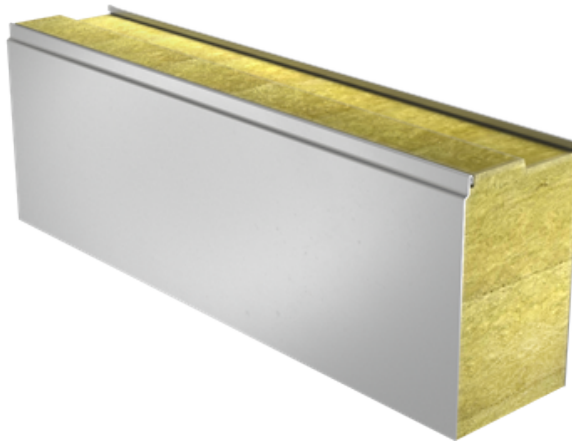

**SEND CONTACT REQUEST**

# Properties

|                           |                                        |
|---------------------------|----------------------------------------|
| Model name                | Sandwich panel SPA I for internal wall |
| Standard module width     | 1200 mm                                |
| Minimum length            | 2000 mm                                |
| Maximum Length            | 13500 mm                               |
| External facing thickness | 0.5 mm                                 |
| Internal facing thickness | 0.5 mm                                 |

| Thickness D (mm)                                                              | 100       | 125       | 150       |
|-------------------------------------------------------------------------------|-----------|-----------|-----------|
| Weight (kg/m <sup>2</sup> )                                                   | 16        | 20        | 22.4      |
| U-value (W/m <sup>2</sup> K)                                                  | 0.38      | 0.31      | 0.26      |
| Sound insulation Rw (dB)                                                      | 29        | 30        | 30        |
| Reaction to fire                                                              | A2-s1, d0 | A2-s1, d0 | A2-s1, d0 |
| GWP-total, A1-A3 (kg CO <sub>2</sub> ◇/m <sup>2</sup> )                       | 29,5      | 30,5      | 31,4      |
| GWP-total, A1-A3 (kg CO <sub>2</sub> e/m <sup>2</sup> ) for Ruukki® LowCarbon | -         | -         | -         |

| Wall fire resistance values & max span horizontal / vertical orientation (m): | 100       | 125       | 150       |
|-------------------------------------------------------------------------------|-----------|-----------|-----------|
| EI 30                                                                         | 7.5 / 7.5 | 7.5 / 7.5 | 9.0 / 8.8 |
| EI 30 (stainless steel)                                                       | -         | -         | 7.5 / -   |
| EI 60                                                                         | 7.5 / 7.5 | 7.5 / 7.5 | 9.0 / 8.8 |
| EI 60 (stainless steel)                                                       | -         | -         | 7.5 / -   |
| EI 90                                                                         | -         | 7.5 / 7.5 | 7.5 / 8.8 |
| EI 90 (stainless steel)                                                       | -         | -         | 6.0 / -   |
| EI 120                                                                        | -         | 7.5 / 7.5 | 7.5 / 7.5 |
| EI 180                                                                        | -         | -         | 4.0 / -   |

Detailed information regarding the application of fire resistance ratings can be obtained from Ruukki Sales.

All properties are declared in accordance with EN 14509 and related standards.

# Coatings and colors

## Materials

| Facing   | Coating            | Corrosivity category | UV resistance | Colours |
|----------|--------------------|----------------------|---------------|---------|
| Internal | Polyester          | C3                   | -             | RR20    |
| Internal | Foodsafe Laminate* | C4                   | -             | White   |
| Internal | Stainless steel*   | C4                   | -             | -       |


*\*) optional material*

*UV resistance describes how well the coating is able to keep its original colour and gloss levels in accordance with EN10169. The higher the class, the better the resistance.*

*Corrosivity categories describe the outdoor climate conditions in accordance with EN12944. The higher the category, the more corrosive environment.*



RR20 Winter White



RR21 Pebble Grey

## Profiles



Micro 15



Rib 150




Rib 200



Rib 600



Flat F



Linear 50

## Design tools



### **Traypan® software for designing sandwich panels**

With TrayPan®, you can design metal faced sandwich panels made by Ruukki. A panel structure can be designed as a single- or multi-span construction. You can easily give, with a few parameters, both suction and pressure loads caused by the wind. The application also calculates the necessary fasteners.

[Go to Traypan®](#)



## Download BIM objects to your desktop

ProdLib brings Ruukki products as BIM models directly to your desktop in 3D form for design programs AutoCAD, Autodesk Revit, Archicad and Tekla Structures. Product libraries compile all necessary design models and detailed drawings in one place. Library updates are automatically notified, so as a user you can be sure that your product information is constantly up to date. ProdLib can also be used as a standalone desktop application.

[Go to BIM library](#)

## Technical documents

Here you can find all technical documents related to Ruukki's sandwich panels. Documents are organised by document type. Click to enter document library.

**Product  
descriptions**



**Accessory  
documents**



**Installation  
instructions**



**Load tables**



**Maintenance  
instructions**



**Sound  
insulation  
values**



## Certificates and approvals

Here you can find all certificates and approvals related to Ruukki's sandwich panels. Documents are organised by document type. Click to enter document library.

**Declaration of  
performance**



**Environmental  
product  
declaration**



**Intruder  
resistance  
certificate**



**M1 Emission  
Classification**

