

# Lamele Groove 30

Izveidojiet fasādi ar rievotu virsmas struktūru, izmantojot Lameles Groove 30.


## Ruukki® Emotion

Pieejams gan ar perforāciju, gan apgaismojumu.




**SAZINĀŠANĀS PIEPRASĪJUMS**

# Tehniskais raksturojums

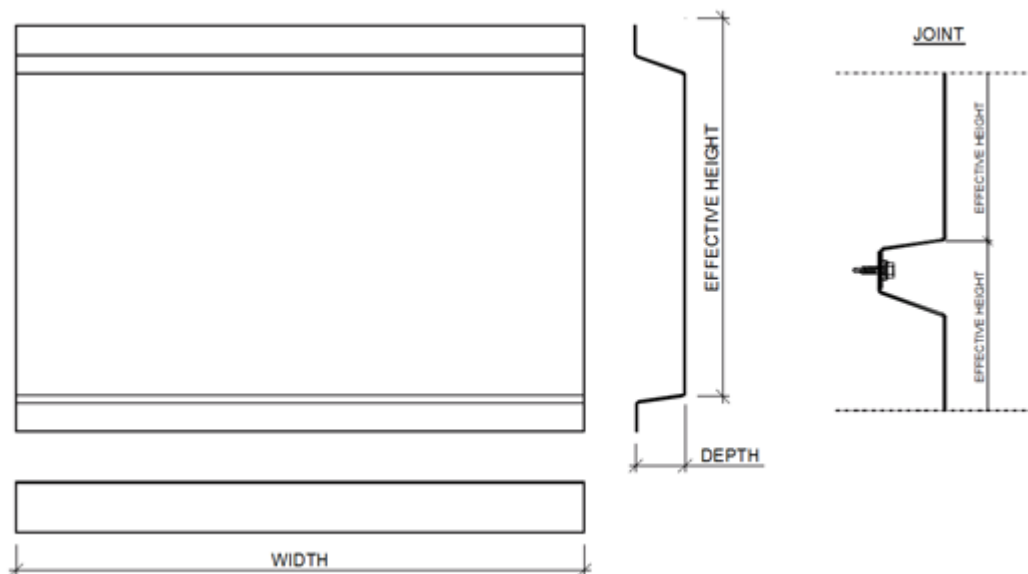

Nosaukums	Lamele Groove 30
Sedzošais augstums	Izmaksu un atlikumu ziņā optimizēts izmēru klāsts 370 - 390 mm (min. 150 mm, max. 500 mm)
Platums	150 - 4000 mm
Dziļums	40 mm

## Perforation layout

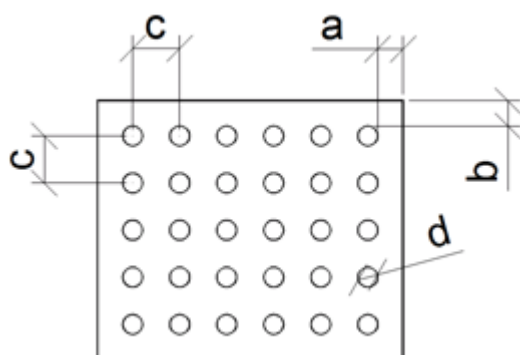

Dimension/hole	mm
a	≥10
b	≥10

c	≥ d+25
d	16, 20, 30, 40, 50, 60

Symmetrical perforation: Fully perforated in symmetrical square layout. Only 1 hole size (d) and distance (a, b, c) per product.

Art perforation: Fully or partly perforated in freely chosen locations. All hole sizes (d) and distances (c) available per product.

## Materiali

Material	Material thickness (mm)	Weight (kg/m <sup>2</sup> )	Surface treatment	GWP A1-A3 (kg CO <sub>2</sub> equiv./m <sup>2</sup> )	Available with perforation	Minimum order amount (m <sup>2</sup> )	Reaction to fire
Steel	1.2	9.7	GreenCoat Pural BT (Satin, Metallic)	30.2	No	Standard colours: No limitations Extended colours: 900	A1
	1.2	9.7	Powder coating	30.2	Yes	100	A2 - s1, d0
Aluminium	2.0	5.6	Powder coating	55.6	Yes	250	-
	2.0	5.6	PVDF coating	37.3	Yes	250	-
	1.5	4.2	Powder coating	41.7	Yes	250	-
	1.5	4.2	PVDF coating	28.0	Yes	350	-
Rheinzink	1.0	7.4	Pre-patinated (no coating)	35.1	Limited	100	A1
Copper - Nordic Standard	1.5	13.9	Pre-patinated (no coating)	9.97	Limited	60	A1
	1.0	9.3	Pre-patinated (no coating)	6.67	Limited	60	A1
Copper - Nordic Green, Blue or Brown	1.5	13.9	Pre-patinated (no coating)	10.9	Limited	60	A1

	1.0	9.3	Pre-patinated (no coating)	7.31	Limited	60	A1
Brass - Nordic Brass	1.5	13.5	Pre-patinated (no coating)	24.5	Limited	60	A1
	1.0	9.0	Pre-patinated (no coating)	16.3	Limited	60	A1
Bronze - Nordic Bronze	1.5	13.5	Pre-patinated (no coating)	14.0	Limited	60	A1
	1.0	9.0	Pre-patinated (no coating)	9.32	Limited	60	A1
Bronze - Nordic Royal	1.5	13.5	Pre-patinated (no coating)	32.4	Limited	60	A1
	1.0	9.0	Pre-patinated (no coating)	21.6	Limited	60	A1
Stainless steel	1.0	8.2	Smooth (2B)	32.8	Limited	125	A1
	1.0	8.2	Wet grinded (4N)	32.8	Limited	125	A1


## Pārklājumi un krāsas

### GreenCoat Pural BT (Standarta krāsas)


Krāsas spīduma pakāpe: 20 GU (Satin) / 40 GU (Metallic)




RR20



RR21



RR23



RR33



RR40



RR41



RR42



RR45



RR979

---

## Paplašināts krāsu klāsts

- [GreenCoat Pural BT \(Krāsots tērauds\)](#)
- [PVDF \(Alumīnijs\)](#)
- [Pulverkrāsa \(Krāsots tērauds\)](#)
- [Pulverkrāsa \(Alumīnijs\)](#)

## BIM objekti



### Lejuplādēt BIM objektus

ProLib bibliotēka Ruukki produktus kā 3D BIM modeļus ļauj izmantot projektēšanas datorprogrammās AutoCad, Autodesk Revit, Archicad un Tekla Structures. Produktu bibliotēkās ir apkopoti visi nepieciešamie projektēšanas modeļi un detalizācijas. Automātiski paziņojumi par bibliotēku atjauninājumiem nodrošina lietotāju produktu informācijas konsekventu atjaunināšanu.

[Dotes uz BIM bibliotēku](#)

# Lejuplādēt dokumentus

## Ekspluatācijas īpašību deklarācija



**Declaration of Performance 25/PP/PAR - Cladding products**

PDF, 43,7 KB

## Pasūtījuma veidlapa



**Ruukki cladding lamellas order form 2.4.5**

XLSM, 1,1 MB

## Apkopes instrukcijas



**Ruukki Cor-Ten facades - maintenance instructions**

PDF, 70,3 KB



**Ruukki powder coated facade claddings - Maintenance instructions**

PDF, 0,6 MB



**Ruukki colour coated steel - Maintenance instructions**

PDF, 0,6 MB

## Papildu dokumenti



**Facade cladding accessories 02\_2025 ENG**

PDF, 4,1 MB

## References

[Skatīt visas fasādes apšuvuma lameļu references](#)