



Design Panel DP V3

Designpanel V3 är lämplig för vertikal installation. Denna panel gör det möjligt att designa fasader med böjd geometri. Minsta böjningsradie är 800 mm. Beroende på tjocklek finns panelen tillgänglig med PIR- eller mineralullskärna.

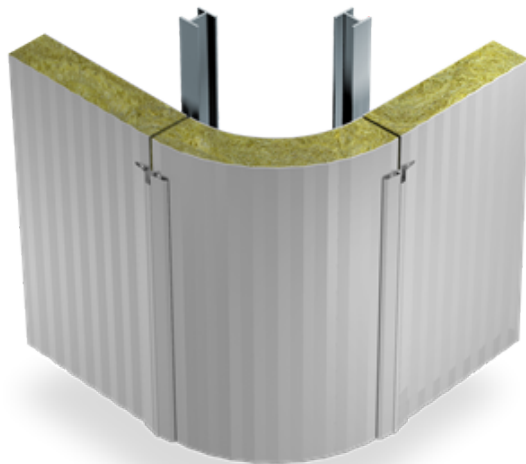

SÄND KONTAKTFÖRFRÅGAN

Egenskaper

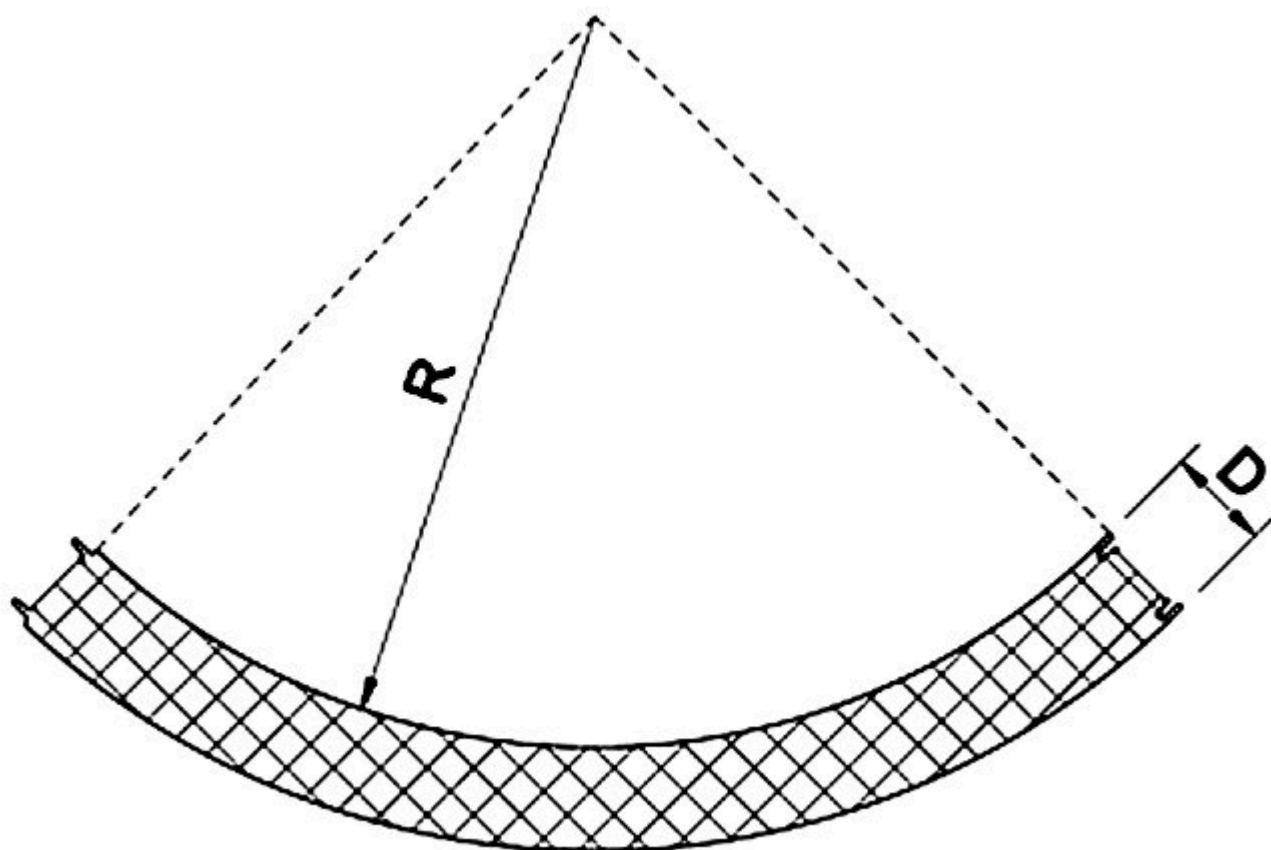

Tabell 1 – tillgängliga dimensioner

Paneltjocklek D (mm)	Maxlängd L (mm)	Minsta radie R (mm)
80, 100, 110, 120, 140, 150	6000	800

Tabell 2 – tjocklekar och kärntyper tillgängliga för designpanel DP V3


Tjocklek (mm)	Kärntyp	DP V3
60	PIR	-
80	PIR	SP2B, SP2D
100	PIR	SP2B, SP2D
110	PIR	SP2B
120	PIR	SP2D, SP2E
140	PIR	-
160	PIR	-

80	mineralull	nSPB
100	mineralull	nSPB, nSPD
110	mineralull	nSPB
120	mineralull	nSPB, nSPD
140	mineralull	nSPB
150	mineralull	nSPB, nSPD
160	mineralull	-
170	mineralull	-
180	mineralull	-
200	mineralull	-
210	mineralull	-
230	mineralull	-


Alla egenskaper är deklarerade enligt EN 14509 och relaterade standarder.

Beläggningar och kulörer


Vertical corner panels Design Panels V3 can be manufactured with different coatings, profile options and colors. The availability of specific features is compliant with the options existing for corresponding standard panels. NOTE: L25 is not available on internal face.




RAL1015 Light ivory RR807




RAL3013 Tomato red RR774




RAL5005 Signal blue




RAL6011 Reseda green RR526



RAL7015 Slate grey RR23




RAL7016 Anthracite grey RR288




RAL7035 Light grey RR2B1



RAL9002 Grey white



RAL9006 White aluminium RR946



RAL9007 Grey aluminium



RAL9010 Pure white RR1G5