

Liberta Original 102

Create a genuine and distinct layout with the Liberta Original 102 rainscreen panel for ventilated steel and aluminium facade systems.

Ruukki® Emotion

Also available with perforation and backlighting.


This product is optionally available with following sustainable features:

- Steel facings made of recycled steel (SSAB Zero) for significantly lower CO₂ emissions and high circularity (Ruukki LowCarbon)




[SEND CONTACT REQUEST](#)

Properties

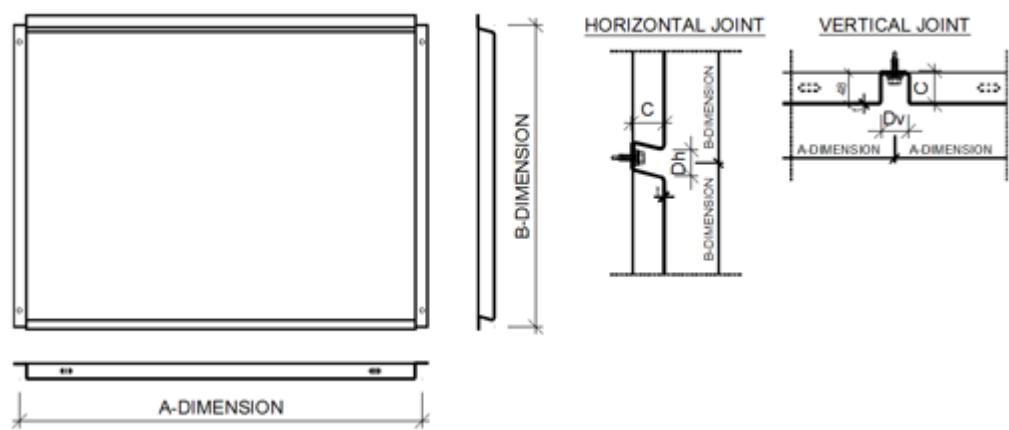

Model name	Liberta Original 102
Depth	20, 25, 30 mm
Horizontal joint	20, 25, 30 mm
Vertical joint	20, 25, 30 mm
Fastening Style	Standard fix

Perforation layout

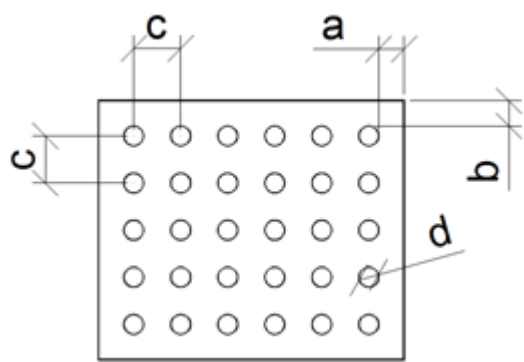

Dimension/hole	mm
a	≥10
b	≥10
c	≥ d+25

d	16, 20, 30, 40, 50, 60
---	------------------------

Symmetrical perforation: Fully perforated in symmetrical square layout. Only 1 hole size (d) and distance (a, b, c) per product.

Art perforation: Fully or partly perforated in freely chosen locations. All hole sizes (d) and distances (c) available per product.

Size table

Click on the picture to see full resolution.

Material:


- HIARC coated steel 1.2 mm
- Powder coated steel 1.2 mm
- Aluminum 2.0 mm

Material:

- Aluminum 1.5 mm
- Stainless steel 1.0 mm

Material:

- Rheinzink 1.0 mm
- Copper 1.0 mm
- Copper 1.5 mm

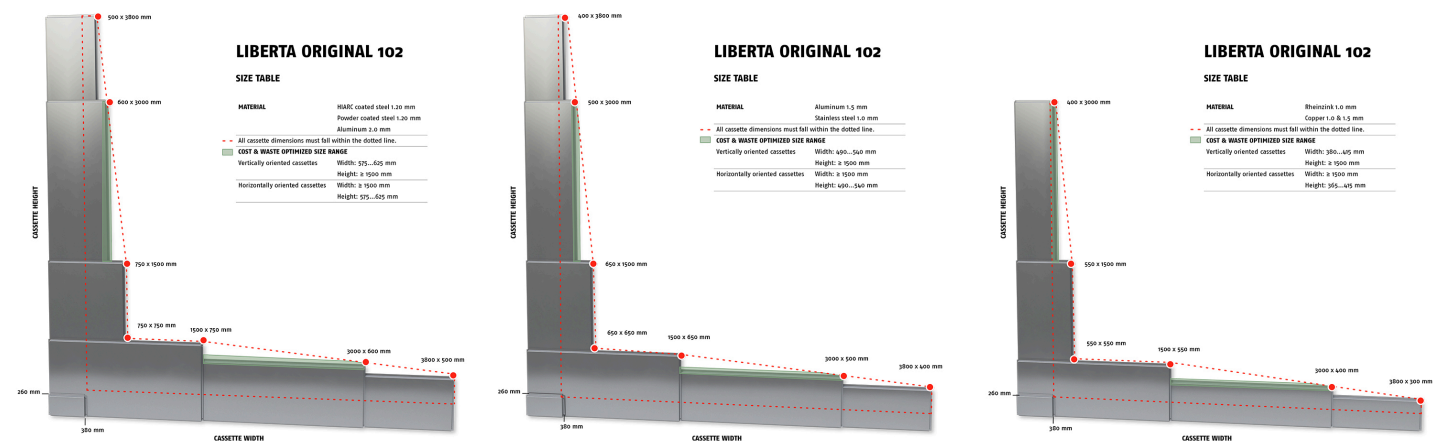

Materials

Materials

Material	Material thickness (mm)	Weight (kg/m ²)	Surface treatment	GWP A1-A3 (kg CO ₂ equiv./m ²)	Available with perforation	Minimum order amount (m ²)	Reaction to fire
Zero Steel (LowCarbon)	1.2	11.4	GreenCoat Pural BT (Satin, Metallic)	~14.5 (estimation) *	No	900 (limited availability)	A1

Steel	1.2	11.4	GreenCoat Pural BT (Satin, Metallic)	35.5	No	Standard colours: No limitations Extended colours: 900	A1
	1.2	11.4	Powder coating	35.5	Yes	100	A2 - s1, d0
Aluminium	2.0	6.5	Powder coating	64.5	Yes	250	-
	2.0	6.5	PVDF coating	43.3	Yes	250	-
	1.5	4.9	Powder coating	48.6	Yes	250	-
	1.5	4.9	PVDF coating	32.7	Yes	350	-
Rheinzink	1.0	8.7	Pre-patinated (no coating)	41.3	Limited	100	A1
Copper - Nordic Standard	1.5	16.2	Pre-patinated (no coating)	11.6	Limited	60	A1
	1.0	10.8	Pre-patinated (no coating)	7.74	Limited	60	A1
Copper - Nordic Green, Blue or Brown	1.5	16.2	Pre-patinated (no coating)	12.7	Limited	60	A1
	1.0	10.8	Pre-patinated (no coating)	8.49	Limited	60	A1
Brass - Nordic Brass	1.5	15.7	Pre-patinated (no coating)	28.5	Limited	60	A1
	1.0	10.5	Pre-patinated (no coating)	19.0	Limited	60	A1
Bronze - Nordic Bronze	1.5	15.7	Pre-patinated (no coating)	16.3	Limited	60	A1
	1.0	10.5	Pre-patinated (no coating)	10.9	Limited	60	A1
Bronze - Nordic Royal	1.5	15.7	Pre-patinated (no coating)	37.7	Limited	60	A1
	1.0	10.5	Pre-patinated (no coating)	25.2	Limited	60	A1
Stainless steel	1.0	9.5	Smooth (2B)	38.0	Limited	125	A1
	1.0	9,5	Wet grinded	38.0	Limited	125	A1

		(4N)				
--	--	------	--	--	--	--

*) Calculations have been made using estimate for SSAB Zero™ recycled steel and data from Ruukki’s current Environmental Product Declaration (EPD) documents. The calculations are based on current estimates (3/2025).


Coatings and colors

GreenCoat Pural BT (Standard colours)


Gloss level: 20 GU (Satin) / 40 GU (Metallic)




RR20 Winter white



RR21 Pebble grey



RR23 Mountain grey



RR33 Nordic night black



RR40 Metallic silver



RR41 Metallic dark silver



RR42 Metallic gold



RR45 Metallic titanium



RR979 Metallic copper

Extended colours

- GreenCoat Pural BT (steel)

- PVDF (aluminium)
- Powder paint (steel)
- Powder paint (aluminium)

BIM objects



Download BIM objects to your desktop

ProLib brings Ruukki products as BIM models directly to your desktop in 3D form for design programs AutoCad, Autodesk Revit, Archicad and Tekla Structures. Product libraries compile all necessary design models and detailed drawings in one place. Library updates are automatically notified, so as a user you can be sure that your product information is consistently up to date. ProLib can also be used as a standalone desktop application.

[Go to BIM library](#)

Download documents

Declaration of performance



Declaration of Performance 25/PP/PAR - Cladding products

PDF, 43.7 KB

Order form



Ruukki Liberta rainscreen panels order form 2.4

XLSM, 5.1 MB

Maintenance instructions



Ruukki Cor-Ten facades - maintenance instructions

PDF, 70.3 KB



Ruukki powder coated facade claddings - Maintenance instructions

PDF, 0.6 MB



Ruukki colour coated steel - Maintenance instructions

PDF, 0.6 MB


Accessory documents



Facade cladding accessories 02_2025 ENG


PDF, 4.1 MB

References

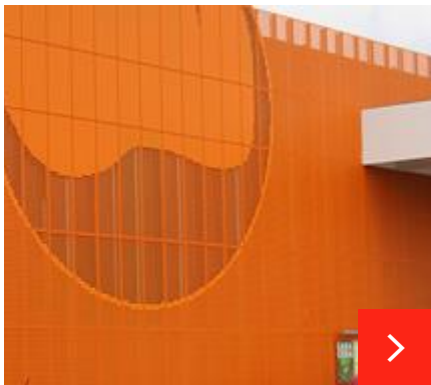

Mall "Apelsīns"

In cooperation with Ruukki, a facade cassette mounting and perforation solution was developed that allowed the desired result - a unique and impressive view of ...

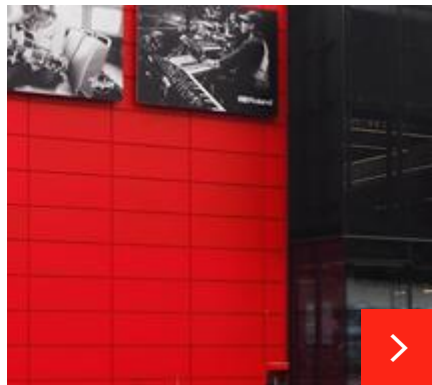


Retail shop – Kytary.cz

Ruukki delivered Liberta Original 102 panels for the facade cladding. The colour of the panels can be changed into the desired hue, and today, Kytary.cz is an e...



Sports centre – Mariahallen

"It's at its most impressive in the evening, when the lights are lit behind the steel rainscreen panels and the turquoise of the panels shines behind the perfor..."

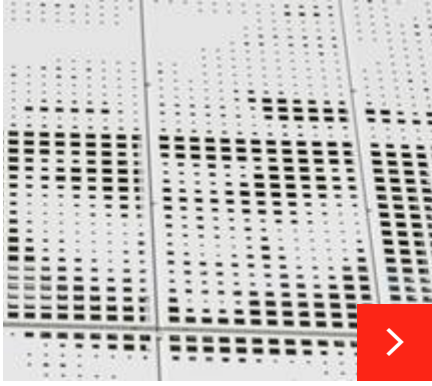

BMX track of Valmiera city

This was a nice and a special project, where we made perforation pattern using Ruukki Liberta Original 102 special perforation of legendary sportsman – Māris Št...

[See all rainscreen panel references](#)