

Sandwich panel SPA E Life Energy

Sandwich panel **SPA E Life Energy** is available in thicknesses 200 - 230 mm.

With precise and Ruukki specific manufacturing tolerances, and factory-fitted seals on the panel joints, the Ruukki® Energy panel structure with its seams forms a very airtight solution. Together with Ruukki Airtightness package it's possible to achieve excellent airtightness to the entire building. This can decrease energy costs and CO2 emissions up to 30%. [Read more on airtightness package.](#)

With its exceptionally high recycled content, this sustainable sandwich panel minimises the use of raw materials and energy as well as reduces the carbon emissions during the construction phase. Our life panel can be re-used and fully recycled. It is an ideal solution for facades with high requirements for sustainability.

Using Ruukki's solutions you can receive more credits in LEED and BREEAM certification systems. This panel type is intruder resistant in accordance with SSF 1047, class 2 (see Certificates & approvals).

The filling consisting of non-combustible and environmentally friendly soft mineral wool with low U-value ensures very good thermal insulation of this panel. Properly milled core increases air-tightness and provides high sound insulation.


Application:

- External walls

The upper face of the panel includes a Ruukki® Rain Protect membrane that will prevent the insulation from getting wet during installation (panel thickness 150-230mm).

This product is optionally available with following sustainable features:

- Steel facings made of recycled steel (SSAB Zero) for significantly lower CO₂ emissions and high circularity (Ruukki LowCarbon)
- Insulation made of recycled glass for high circularity
- Air tightness package for lower CO₂ emissions during building use

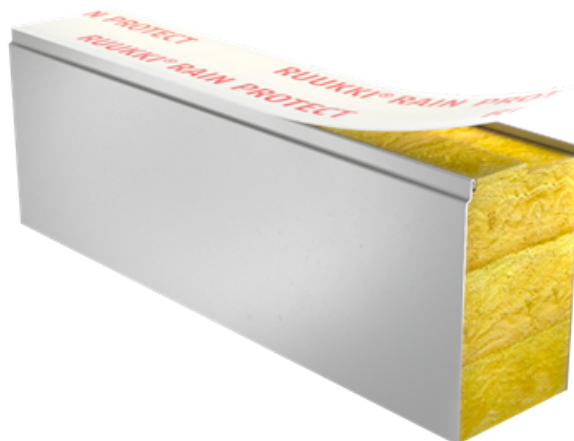

[SEND CONTACT REQUEST](#)

Properties

Model name	Sandwich panel SPA E Life Energy
Standard module width	1200 mm
Minimum length	2000 mm
Maximum Length	13500 mm
External facing thickness	0.6 mm
Internal facing thickness	0.5 mm
Air Tightness	q50=0,01 m3/hm2 (pressure and suction)

Thickness D (mm)	200	230
Weight (kg/m ²)	21.2	23.2
U-value (W/m ² K)	0.19	0.16
Sound insulation Rw (dB)	29	29
Reaction to fire	A2-s1, d0	A2-s1, d0
GWP-total, A1-A3 (kg CO ₂ ◇/m ²)	37,9	39,9
GWP-total, A1-A3 (kg CO ₂ e/m ²) for Ruukki® LowCarbon	23,2	25,4

Wall fire resistance values & max span horizontal / vertical orientation (m):	200	230
EI 30	7.5 / -	7.5 / -
EI 30 (stainless steel)	7.5 / -	7.5 / -
EI 60	7.5 / -	7.5 / -
EI 60 (stainless steel)	7.5 / -	7.5 / -

Detailed information regarding the application of fire resistance ratings can be obtained from Ruukki Sales.

All properties are declared in accordance with EN 14509 and related standards.

Coatings and colors

Materials


Facing	Coating	Gloss level (GU)	Corrosivity category	UV resistance	Colours
External	GreenCoat Pural BT Satin	20	C4	Ruv4-5	RR20, RR21, RR22, RR23, RR29, RR33, RR35
External	GreenCoat Pural BT Metallic	40	C4	Ruv4	RR40, RR41, RR45
External	Polyester	35	C3	Ruv2-3	RR20, RR21, RR23, RR946
Internal	Polyester	35	C3	-	RR20
Internal	Foodsafe laminate *		C4	-	White
Internal	Stainless steel		C4	-	-

**) optional material*


UV resistance describes how well the coating is able to keep its original colour and gloss levels in accordance with EN10169. The higher the class, the better the resistance.

Corrosivity categories describe the outdoor climate conditions in accordance with EN12944. The higher the category, the more corrosive environment.


Read more about UV-resistance and corrosivity categories.

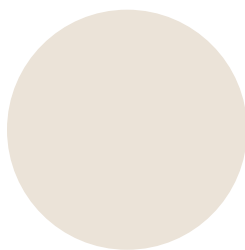


RR20 Winter White

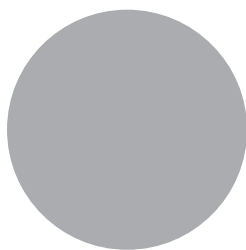


RR21 Pebble Grey

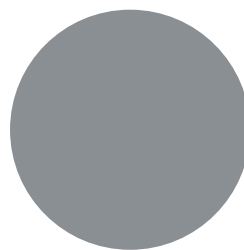

RR22 Stone Grey




RR23 Mountain Grey



RR29 Cottage Red



RR33 Nordic Night Black



RR35 Lake Blue




RR40 Metallic Silver



RR41 Metallic Dark Silver



RR45 Metallic Titanium



RR946 Metallic Silver

Profile options



Profile option Micro 15



Profile option Rib 150




Profile option Rib 200



Profile option Rib 600



Profile option Flat

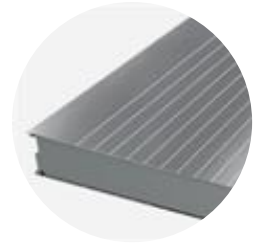

Profile option Linear 50

Design tools



Traypan® software for designing sandwich panels

With TrayPan®, you can design metal faced sandwich panels made by Ruukki. A panel structure can be designed as a single- or multi-span construction. You can easily give, with a few parameters, both suction and pressure loads caused by the wind. The application also calculates the necessary fasteners.

[Go to Traypan®](#)



Download BIM objects to your desktop

ProLib brings Ruukki products as BIM models directly to your desktop in 3D form for design programs AutoCad, Autodesk Revit, Archicad and Tekla Structures. Product libraries compile all necessary design models and detailed drawings in one place. Library updates are automatically notified, so as a user you can be sure that your product information is consistently up to date. ProdLib can also be used as a standalone desktop application.

[Go to BIM library](#)

Technical documents

Here you can find all technical documents related to Ruukki's sandwich panels. Documents are organised by document type. Click to enter document library.

**Product
descriptions**



**Accessory
documents**



Load tables



**Installation
instructions**



**Maintenance
instructions**



**Sound insulation
values**



Certificates and approvals

Here you can find all certificates and approvals related to Ruukki's sandwich panels. Documents are organised by document type. Click to enter document library.

**Declaration of
performance**



**Environmental
product declaration**



**Intruder resistance
certificate**

